



Lightsource Test Report

Product Infomation

Product Number: 195

CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.3455$ $y=0.3611$ $u(u')=0.2080$ $v=0.3262$ $v'=0.4893$

CCT: $T_c=5018K$ ($duv=0.00454$)

Color Ratio: $R=0.151$ $G=0.805$ $B=0.044$

Peak Wavelength: 450.8nm

Half Bandwidth: 16.3nm

Dominant Wavelength: 568.6nm

Color Purity: 0.120

Central Wave: 451.7nm

Gravity Wave: 451.4nm

CRI: $R_a=80.6$

TM30: $R_f=82$, $R_g=94$

GAI: $GAI_BB_8=89.2$, $GAI_BB_15=95.5$, $GAI_EES=78.6$

$R1=78$

$R2=87$

$R3=93$

$R4=80$

$R5=79$

$R6=82$

$R7=85$

$R8=62$

$R9=-9$

$R10=69$

$R11=79$

$R12=56$

$R13=80$

$R14=96$

$R15=71$

Color Quality Scale: $Q_a=79.7$, $Q_f=79.9$, $Q_p=79.4$, $Q_g=90.7$

$Q1=80$

$Q2=98$

$Q3=76$

$Q4=72$

$Q5=78$

$Q6=81$

$Q7=84$

$Q8=88$

$Q9=97$

$Q10=86$


$Q11=82$

$Q12=80$

$Q13=80$

$Q14=66$

$Q15=72$

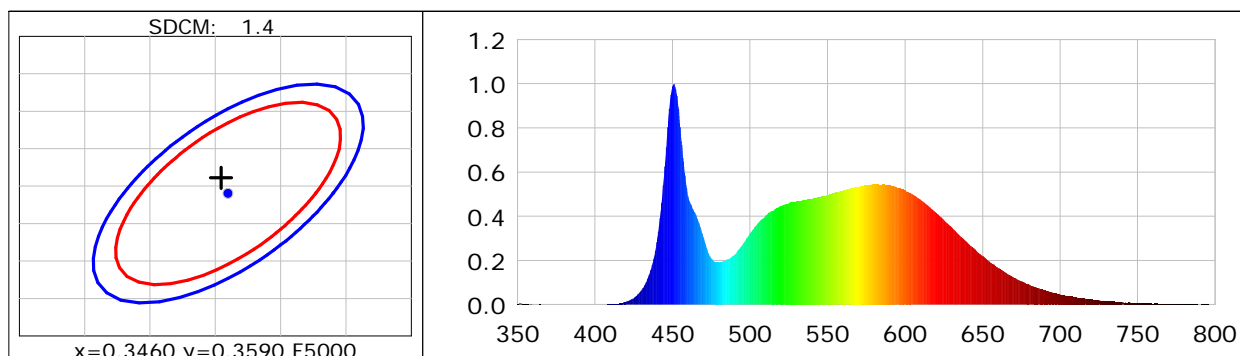

Photometric Parameters

Luminous Flux: 30342 lm

Efficiency: 154.38 lm/W

Radiant Power: 142.917 W

Total mains efficacy: 154.38 lm/W Energy Efficiency Class: A (EU 2019/2015)

Auxiliary lamp correction factor: 1.00

Electric Parameters

Voltage: 219.56V

Current: 0.8958A

Power: 196.54W

Power Factor: 0.9992

Frequency: 49.99Hz

DF: 1.0000

Test Infomation

Scan Range: 350~800:1nm

Stabilization Time: 0 Min ALC.: 1.0000

Max of Signal: 47632 (1928)

Photometric Method: sphere-spectroradiometer

Photometric Condition: Sphere diameter: 2.00m, 4T

CCD Integration Time: 21.79 ms

Condition: Tx: 14.3°C, Ti: 12.8°C, R.H.: 60%

Test Lab:

Operator:

Test Device: CMS-3500S

Test Time: 2025-01-11 12:35:11

Inspector: