

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	483.1 cd per klm. -23.5 degrees vertical 22.0 degrees horizontal
---	--

Beam Spread	At 10% of I _{max}	122.0V x 139.1H
	At 50% of I _{max}	82.9V x 115.8H
	At 90% of I _{max}	47.2V x 86.7H

Beam Flux	Total	1000.0 lumens per klm.
	To 10% of I _{max}	967.1 lumens per klm.
	To 50% of I _{max}	751.6 lumens per klm.
	To 90% of I _{max}	256.2 lumens per klm.

Upward LOR	0.0 %
Downward LOR	100.0 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:1
Test Date:2024-03-20

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:6.790m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:509.928x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:一体透镜二代1头-5000K-4AH-高亮	DIM.: 220*215mm	SERIAL No.:
MFR.: EVERFINE	SUR.:170*75m	Shielding Angle:

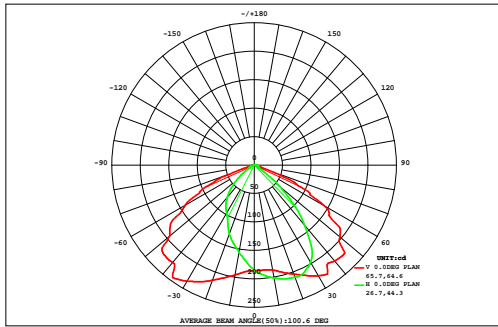

DATA OF LAMP		PHOTOMETRIC DATA	
MODEL		Imax(cd)	246.4
NOMINAL POWER(W)		AVAILABILITY(%)	96.7
RATED VOLTAGE(V)		Avai. FLUX(lm)	493.3
NOMINAL FLUX(lm)	509.928	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	509.9
TEST VOLTAGE(V)	--	θ @50%(H,V)	116,83DEG

AREA FLUX DIAGRAM																	UNIT:lm		Φ t	Φ a
90	0.00	0.00	0.01	0.01	0.02	0.02	0.02	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.26	0.00	
80	0.00	0.01	0.02	0.03	0.06	0.09	0.11	0.11	0.10	0.10	0.12	0.12	0.10	0.07	0.04	0.03	0.02	0.01	1.15	0.00
70	0.00	0.01	0.03	0.10	0.21	0.29	0.36	0.38	0.34	0.35	0.41	0.39	0.31	0.23	0.12	0.05	0.02	0.01	3.61	0.00
60	0.00	0.02	0.07	0.29	0.56	0.69	0.88	0.92	0.80	0.83	1.01	0.98	0.79	0.63	0.36	0.09	0.02	0.01	8.96	6.60
50	0.00	0.02	0.17	0.76	1.23	1.49	1.83	1.98	1.88	1.91	2.08	1.99	1.67	1.33	0.84	0.24	0.03	0.01	19.4	19.1
40	0.00	0.03	0.40	1.31	2.08	2.49	2.68	2.86	2.77	2.81	2.95	2.83	2.66	2.20	1.38	0.50	0.05	0.01	30.0	29.8
30	0.00	0.05	0.68	1.87	2.92	3.44	3.47	3.62	3.55	3.59	3.72	3.65	3.58	3.03	1.94	0.78	0.07	0.01	39.9	39.8
20	0.00	0.06	0.92	2.41	3.67	4.27	4.52	4.41	4.41	4.46	4.55	4.72	4.50	3.77	2.45	1.02	0.10	0.01	50.3	50.1
10	0.00	0.07	1.11	2.84	4.32	5.14	5.44	5.29	5.19	5.26	5.52	5.72	5.44	4.43	2.85	1.21	0.12	0.01	59.9	59.8
0	0.00	0.07	1.11	2.90	4.56	5.59	6.01	5.93	5.86	5.99	6.23	6.33	5.91	4.68	2.92	1.21	0.12	0.01	65.4	65.3
-10	0.00	0.06	0.92	2.55	4.29	5.59	6.31	6.41	6.31	6.44	6.71	6.61	5.88	4.46	2.63	1.02	0.09	0.01	66.3	66.1
-20	0.00	0.04	0.66	2.00	3.70	5.33	6.36	6.55	6.41	6.49	6.78	6.67	5.61	3.92	2.13	0.77	0.07	0.01	63.5	63.4
-30	0.00	0.03	0.38	1.35	2.72	4.30	5.48	5.73	5.51	5.57	5.93	5.81	4.68	2.97	1.48	0.49	0.04	0.01	52.5	52.3
-40	0.00	0.02	0.16	0.71	1.43	2.51	3.41	3.69	3.36	3.44	3.91	3.76	2.91	1.67	0.84	0.23	0.03	0.01	32.1	31.7
-50	0.00	0.02	0.06	0.25	0.48	0.76	1.18	1.31	1.04	1.11	1.50	1.45	1.02	0.63	0.33	0.09	0.03	0.01	11.3	9.29
-60	0.00	0.01	0.04	0.08	0.14	0.20	0.28	0.31	0.27	0.29	0.38	0.36	0.26	0.18	0.11	0.05	0.02	0.01	2.99	0.00
-70	0.00	0.01	0.03	0.05	0.08	0.11	0.14	0.16	0.17	0.17	0.17	0.15	0.12	0.09	0.06	0.04	0.02	0.01	1.56	0.00
-80	0.00	0.01	0.01	0.03	0.04	0.05	0.06	0.06	0.07	0.07	0.07	0.06	0.06	0.05	0.04	0.03	0.02	0.01	0.72	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Φ t	0.05	0.55	6.80	19.6	32.5	42.4	48.5	49.7	48.0	48.9	52.0	51.6	45.5	34.4	20.5	7.85	0.87	0.12	510	---
Φ a	0.00	0.03	6.07	18.8	31.5	41.2	47.3	48.4	46.6	47.4	50.7	50.4	44.4	33.4	19.8	7.06	0.18	0.00	---	493


one-half-peak spread: U:25.5,D:57.9 , L:35.5,NEMA. Beam Type: Type 7 x 6 (H x V)

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:1
 Test Date:2024-03-20

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:6.790m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:509.928x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:一体透镜二代1头-5000K-4AH-高亮	DIM.: 220*215mm	SERIAL No.:
MFR.: EVERFINE	SUR.:170*75m	Shielding Angle:

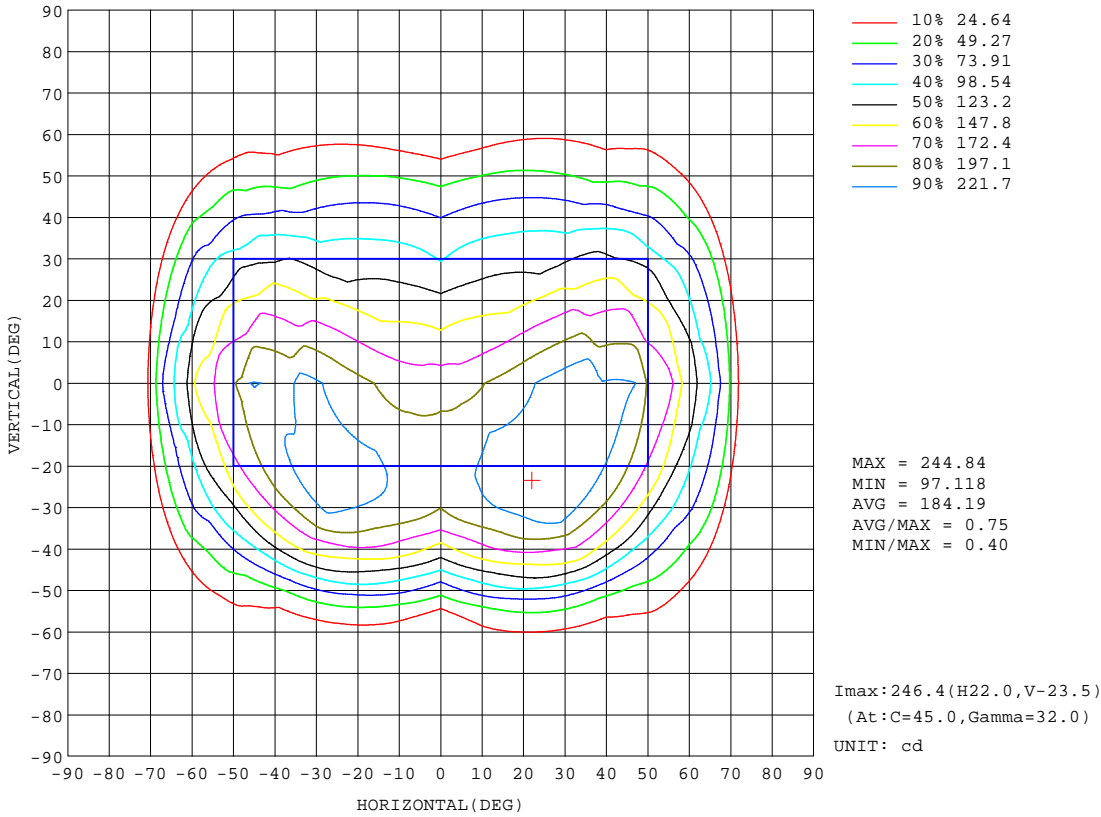


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: 1
 Test Date: 2024-03-20

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity: 65.0%
 Test Distance: 6.790m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM


Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:509.928x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:一体透镜二代1头-5000K-4AH-高亮	DIM.: 220*215mm	SERIAL No.:
MFR.: EVERFINE	SUR.:170*75m	Shielding Angle:

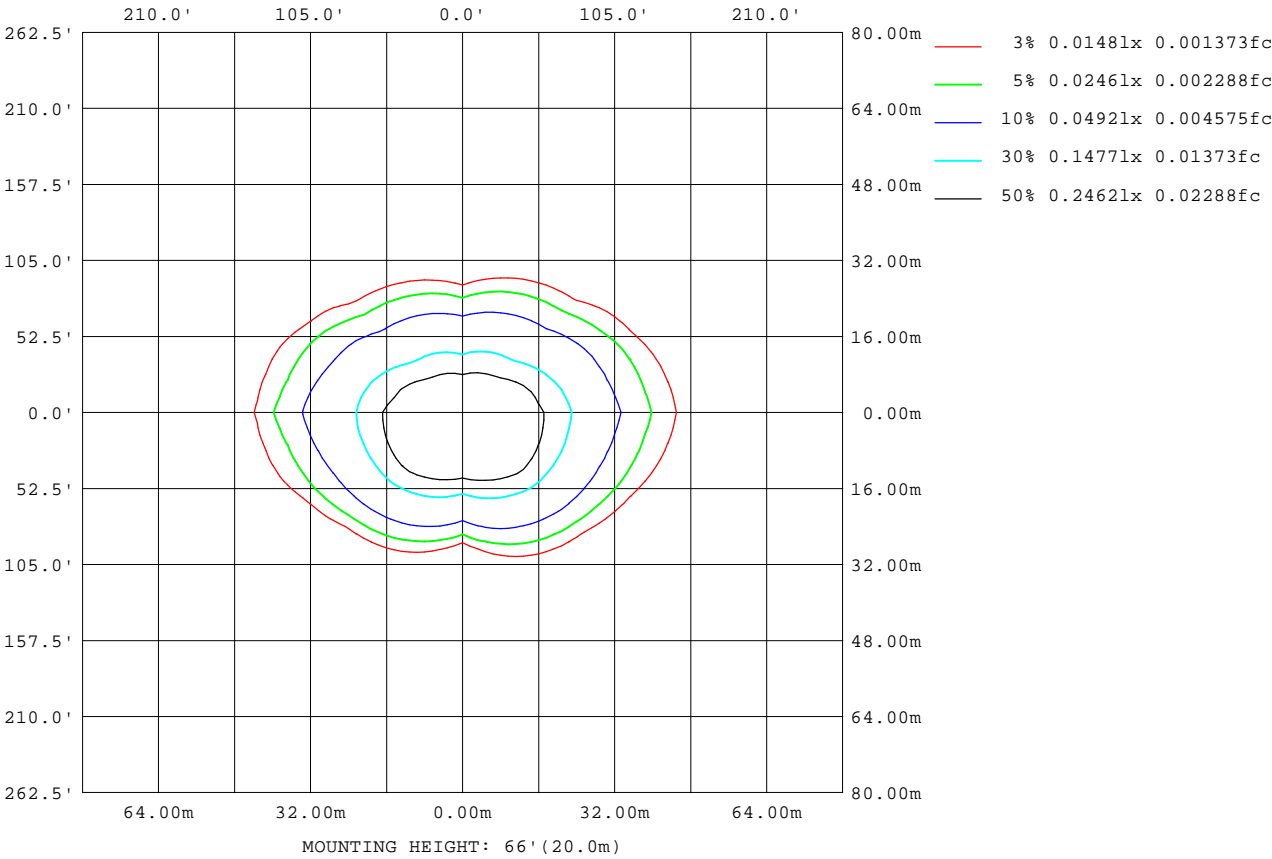

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:1
 Test Date:2024-03-20

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:6.790m [K=1.0000]
 Remarks:

Planar Illuminance Curve

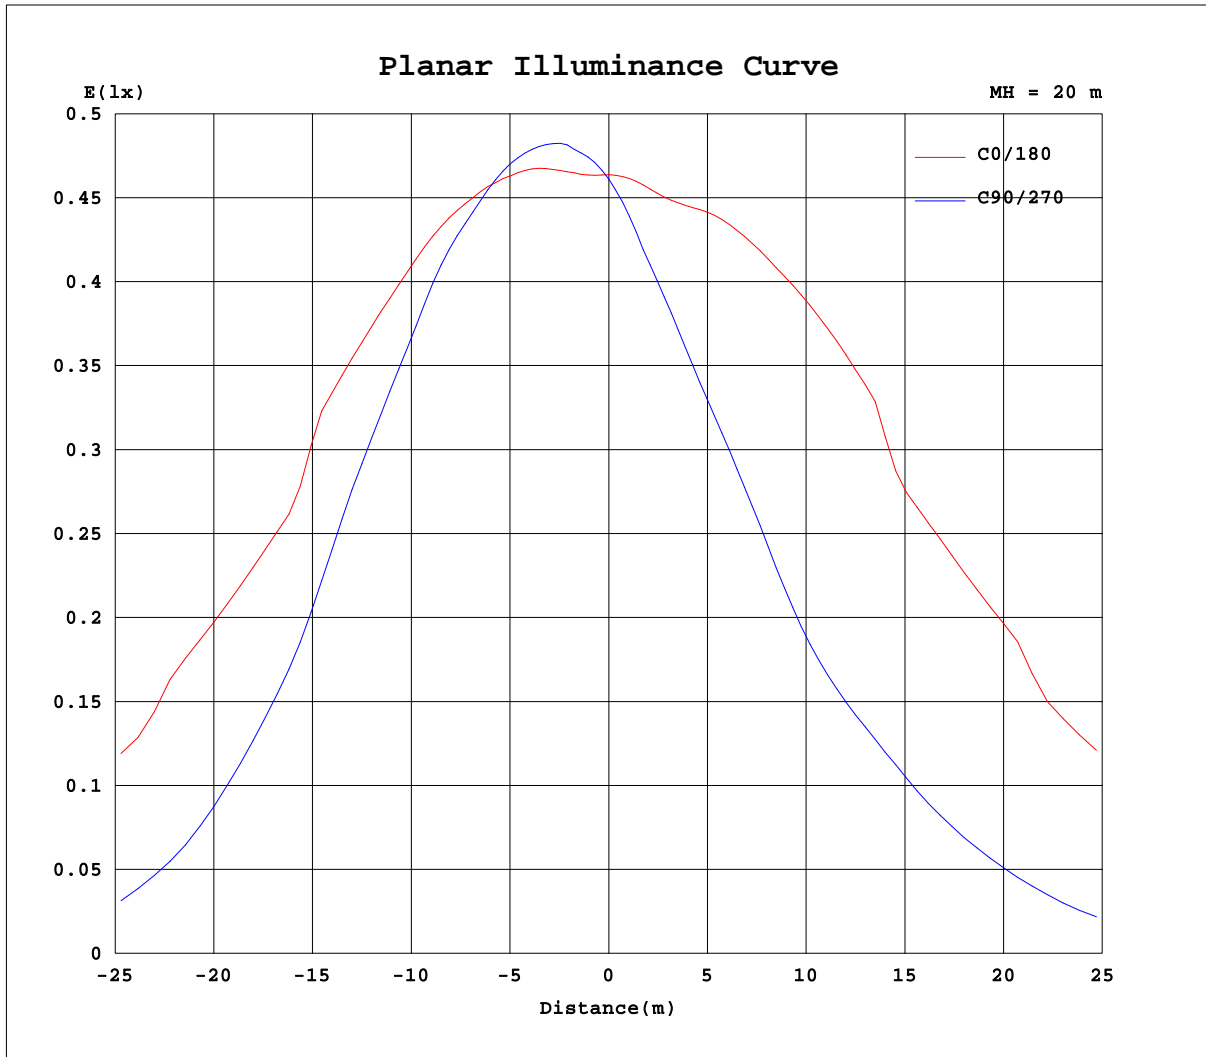


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: 1
 Test Date: 2024-03-20

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity: 65.0%
 Test Distance: 6.790m [K=1.0000]
 Remarks:

AAI Figure

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:509.928x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 一体透镜二代1头-5000K-4AH-高亮	DIM.: 220*215mm	SERIAL No.:
MFR.: EVERFINE	SUR.:170*75m	Shielding Angle:

Flux out:293.7 lm

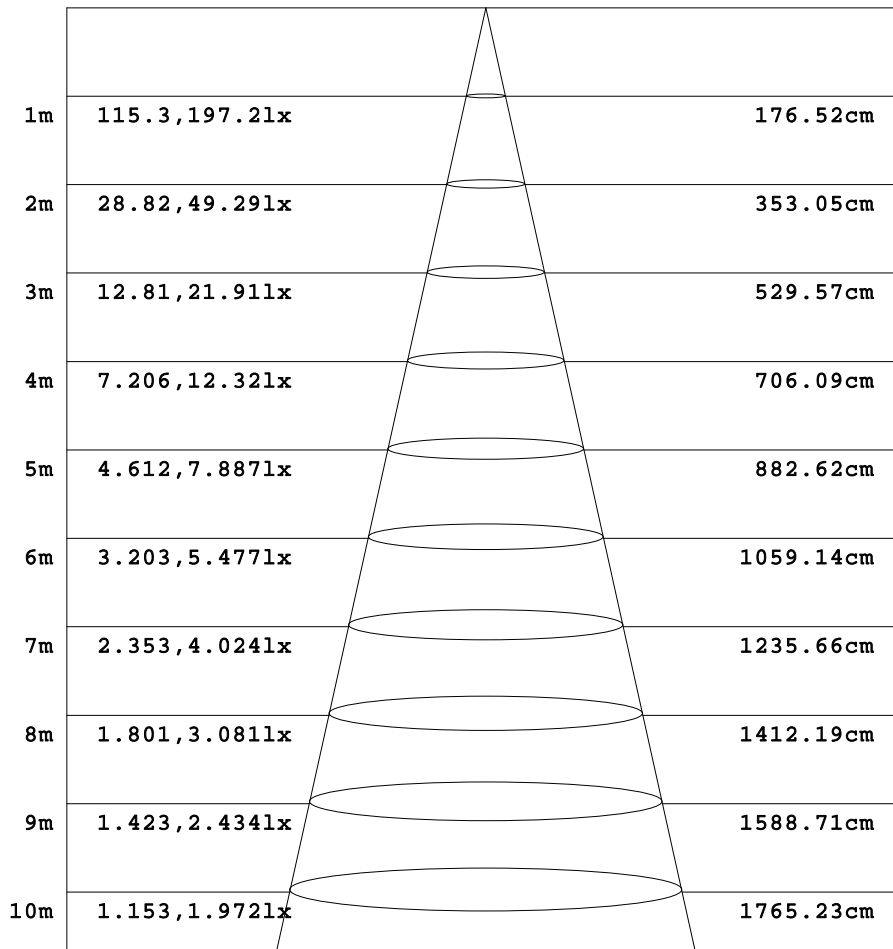

Height Eavg, Emax Angle:82.86deg Diameter

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:1
 Test Date:2024-03-20

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:6.790m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:509.928x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:一体透镜二代1头-5000K-4AH-高亮	DIM.: 220*215mm	SERIAL No.:
MFR.: EVERFINE	SUR.:170*75m	Shielding Angle:

Table--1

UNIT: cd

H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.36	0.48	0.60	0.72	0.84	0.96	1.08	1.21	1.33	1.45	1.35	1.24	1.14	1.04	0.94	0.83	0.73	0.63	0.53
-85	0.36	0.47	0.57	0.68	0.80	0.94	1.11	1.27	1.47	1.72	1.81	1.90	1.99	2.06	2.11	2.16	2.18	2.19	2.18
-80	0.36	0.45	0.57	0.80	1.11	1.50	1.91	2.30	2.68	3.04	3.21	3.38	3.55	3.72	3.87	4.00	4.13	4.23	4.31
-75	0.36	0.45	0.69	1.13	1.64	2.11	2.57	3.01	3.43	3.75	3.98	4.27	4.61	4.91	5.17	5.40	5.58	5.73	5.85
-70	0.36	0.45	0.88	1.48	2.03	2.58	3.14	3.58	4.11	4.64	5.13	5.63	6.04	6.35	6.52	6.60	6.60	6.52	6.41
-65	0.36	0.47	1.10	1.75	2.39	3.05	3.71	4.66	5.59	6.35	6.79	7.46	8.16	8.84	9.36	9.49	9.22	8.43	7.36
-60	0.36	0.55	1.29	1.99	2.77	3.59	4.97	6.65	9.00	11.2	10.1	13.0	16.1	18.1	18.9	18.4	16.5	13.1	8.82
-55	0.36	0.63	1.44	2.24	3.14	4.67	7.06	12.4	19.2	21.5	21.8	27.2	34.4	40.6	42.9	41.7	37.4	30.3	20.8
-50	0.36	0.71	1.57	2.49	3.73	6.24	12.0	25.3	33.0	38.8	44.8	58.6	72.1	79.9	84.6	84.5	79.4	70.4	58.4
-45	0.36	0.79	1.68	2.74	4.65	8.85	25.8	40.6	51.7	64.6	81.9	101	118	126	127	125	120	112	99.2
-40	0.36	0.86	1.80	3.01	5.78	14.5	40.9	59.9	74.4	95.7	120	144	157	164	170	168	161	151	138
-35	0.36	0.91	1.91	3.35	7.30	27.8	53.4	71.8	101	126	154	172	194	203	202	196	191	185	175
-30	0.36	0.96	2.00	3.74	9.28	38.8	70.1	97.0	121	155	175	200	219	225	221	216	211	205	198
-25	0.36	0.99	2.08	4.26	11.7	52.4	83.6	117	146	173	198	217	227	233	231	224	218	212	208
-20	0.36	1.02	2.16	4.73	16.2	63.9	91.4	131	166	185	212	223	229	233	232	224	217	213	210
-15	0.36	1.04	2.21	5.15	22.2	69.9	108	141	177	199	218	223	232	230	224	219	213	208	207
-10	0.36	1.05	2.24	5.48	28.3	76.0	122	151	186	213	221	222	230	224	216	210	205	200	201
-5	0.36	1.05	2.24	5.69	32.7	81.2	134	160	192	219	220	224	227	218	209	202	195	193	194
0	0.36	1.04	2.23	5.77	34.9	85.3	142	166	196	222	220	224	225	214	204	195	187	185	186
5	0.36	1.03	2.22	5.74	32.8	81.4	133	156	185	208	205	205	207	197	188	180	173	170	170
10	0.36	1.02	2.18	5.57	28.6	76.5	121	145	173	193	191	185	190	181	173	165	158	158	155
15	0.36	1.00	2.12	5.28	22.6	70.7	107	133	160	172	176	169	172	165	157	148	147	146	142
20	0.36	0.97	2.04	4.86	16.9	65.0	91.4	123	145	151	161	155	149	146	138	137	136	133	128
25	0.36	0.93	1.92	4.39	12.5	53.6	84.2	111	127	135	144	139	131	124	123	124	121	117	111
30	0.36	0.89	1.81	3.84	10.0	40.1	71.5	93.9	104	118	120	122	114	109	110	110	108	104	97.1
35	0.36	0.84	1.67	3.37	8.01	29.3	55.5	71.6	89.9	97.1	102	100	95.7	97.7	98.2	97.5	95.8	92.4	87.4
40	0.36	0.78	1.53	2.91	6.34	16.0	43.1	61.7	70.7	76.4	81.3	79.8	80.8	84.0	85.2	84.3	82.1	78.4	73.4
45	0.36	0.71	1.39	2.49	5.00	10.2	28.0	43.6	53.0	58.1	58.2	58.0	62.8	67.2	68.6	68.3	66.4	62.9	57.9
50	0.36	0.64	1.27	2.10	3.87	7.26	14.2	28.2	36.5	40.4	39.2	40.1	44.9	48.3	49.3	49.2	47.4	43.8	38.9
55	0.36	0.56	1.14	1.75	2.94	5.20	8.72	15.1	22.7	26.0	25.1	27.2	29.4	30.7	30.9	30.0	28.1	25.0	20.7
60	0.36	0.48	1.01	1.45	2.22	3.62	5.81	8.70	12.2	15.2	15.0	17.7	19.6	20.4	20.1	19.0	17.2	14.7	11.8
65	0.36	0.40	0.86	1.22	1.65	2.45	3.74	5.48	7.52	9.54	10.6	11.2	11.9	12.6	13.1	13.0	12.4	11.3	10.1
70	0.36	0.37	0.70	1.01	1.27	1.63	2.24	3.18	4.44	5.72	6.67	7.40	7.91	8.23	8.31	8.23	7.99	7.64	7.17
75	0.36	0.37	0.53	0.79	1.00	1.17	1.37	1.66	2.12	2.75	3.18	3.45	3.63	3.66	3.60	3.49	3.27	2.93	2.49
80	0.36	0.37	0.41	0.55	0.72	0.86	0.96	1.05	1.13	1.21	1.23	1.22	1.19	1.13	1.03	0.88	0.69	0.47	0.23
85	0.36	0.37	0.40	0.43	0.48	0.54	0.62	0.69	0.74	0.79	0.74	0.69	0.64	0.58	0.51	0.44	0.36	0.28	0.20
90	0.36	0.38	0.41	0.43	0.45	0.48	0.50	0.53	0.55	0.58	0.53	0.49	0.44	0.40	0.35	0.31	0.27	0.22	0.18

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:1
 Test Date:2024-03-20

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:6.790m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:509.928x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 一体透镜二代1头-5000K-4AH-高亮	DIM.: 220*215mm	SERIAL No.:
MFR.: EVERFINE	SUR.:170*75m	Shielding Angle:

Table--2

UNIT: cd

H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.66	0.79	0.92	1.05	1.18	1.32	1.45	1.58	1.71	1.78	1.85	1.92	1.99	2.06	2.13	2.20	2.27	2.34
-85	2.21	2.23	2.23	2.22	2.20	2.17	2.13	2.09	2.06	2.01	2.00	2.02	2.04	2.06	2.09	2.13	2.23	2.34
-80	4.26	4.19	4.10	4.00	3.89	3.76	3.63	3.50	3.36	3.10	2.84	2.60	2.42	2.29	2.23	2.20	2.19	2.34
-75	5.83	5.77	5.67	5.50	5.27	4.99	4.68	4.35	4.07	3.84	3.57	3.27	2.94	2.63	2.41	2.30	2.22	2.34
-70	6.75	7.03	7.18	7.17	7.03	6.80	6.45	5.96	5.37	4.78	4.18	3.75	3.39	3.00	2.63	2.40	2.27	2.34
-65	9.34	11.0	11.9	12.1	11.5	10.4	9.26	8.15	7.89	7.01	5.58	4.52	3.79	3.32	2.86	2.51	2.32	2.34
-60	15.0	20.2	23.6	24.8	24.4	22.4	18.9	14.5	14.8	12.8	9.18	6.21	4.50	3.62	3.08	2.62	2.37	2.34
-55	32.3	41.6	48.3	51.6	51.2	46.2	37.7	30.5	28.3	25.5	18.0	10.2	5.79	4.06	3.29	2.73	2.41	2.34
-50	72.9	84.5	92.3	94.8	91.5	85.5	73.4	58.7	47.0	41.2	33.4	19.2	8.69	4.82	3.49	2.84	2.45	2.34
-45	114	126	133	137	139	134	117	96.3	76.2	58.2	47.9	34.6	14.2	5.85	3.73	2.94	2.48	2.34
-40	153	166	175	179	178	173	161	134	107	84.7	64.6	47.3	24.0	7.95	4.06	3.04	2.51	2.34
-35	187	195	203	210	215	210	189	167	139	108	82.7	62.3	36.2	11.1	4.50	3.14	2.53	2.34
-30	207	216	224	230	237	231	213	190	164	135	103	76.5	51.4	15.4	5.01	3.21	2.56	2.34
-25	215	223	232	241	245	238	227	209	180	155	119	85.5	59.5	20.5	5.58	3.28	2.58	2.34
-20	216	224	233	243	245	244	232	220	199	170	133	102	68.6	28.0	6.15	3.34	2.60	2.34
-15	213	220	230	235	240	244	236	226	212	180	151	117	79.2	34.1	6.96	3.39	2.61	2.34
-10	206	216	221	227	235	241	243	227	218	187	165	127	88.3	38.7	7.58	3.43	2.62	2.34
-5	197	204	212	220	230	238	244	225	221	191	173	134	95.5	42.3	7.99	3.44	2.62	2.34
0	188	196	205	215	226	235	243	224	223	194	179	140	101	44.4	8.18	3.44	2.63	2.34
5	171	179	187	197	207	217	224	209	210	183	169	133	95.5	42.4	8.03	3.42	2.61	2.34
10	160	162	171	180	190	198	205	195	196	172	158	125	88.3	39.0	7.65	3.38	2.59	2.34
15	148	151	153	162	172	180	180	180	181	160	142	115	79.4	34.4	7.06	3.32	2.57	2.34
20	135	138	140	143	152	161	160	165	162	146	123	100	68.9	28.4	6.27	3.23	2.54	2.34
25	118	124	127	128	131	138	144	149	138	132	109	84.2	60.1	21.0	5.69	3.13	2.52	2.34
30	105	110	114	115	114	120	127	129	122	113	96.0	76.0	52.2	16.0	5.10	3.02	2.49	2.34
35	93.5	98.0	101	102	103	102	108	107	105	90.8	78.9	62.6	37.2	11.6	4.53	2.90	2.46	2.34
40	79.5	84.1	87.3	89.2	89.2	87.3	86.9	87.8	80.6	74.9	63.4	48.3	25.2	8.39	4.01	2.77	2.43	2.34
45	63.9	68.4	71.5	72.8	72.7	70.8	65.9	63.9	61.6	55.1	48.5	36.0	15.2	6.16	3.55	2.63	2.40	2.34
50	44.9	49.5	52.8	54.6	53.9	50.7	45.9	44.0	43.2	41.5	35.1	20.8	9.47	4.96	3.14	2.53	2.37	2.34
55	26.0	30.1	32.8	34.4	34.5	33.3	31.0	28.3	29.0	27.5	20.0	11.5	6.24	3.94	2.81	2.43	2.33	2.34
60	15.3	18.4	20.7	22.2	22.7	21.9	19.7	16.6	17.4	15.2	10.8	6.90	4.58	3.15	2.53	2.34	2.29	2.34
65	11.7	13.0	13.8	14.0	13.6	12.7	11.8	11.0	10.4	8.50	6.28	4.62	3.31	2.59	2.32	2.26	2.24	2.34
70	7.72	8.13	8.39	8.47	8.38	8.14	7.72	7.14	6.29	5.12	3.96	2.99	2.45	2.22	2.17	2.19	2.19	2.34
75	2.99	3.39	3.67	3.85	3.97	3.99	3.93	3.74	3.32	2.67	2.26	2.04	1.98	2.00	2.05	2.12	2.13	2.34
80	0.52	0.79	1.03	1.23	1.35	1.44	1.47	1.48	1.47	1.52	1.58	1.65	1.74	1.85	1.95	2.02	2.10	2.34
85	0.31	0.41	0.51	0.61	0.70	0.78	0.86	0.94	1.01	1.15	1.30	1.44	1.57	1.70	1.81	1.94	2.13	2.34
90	0.25	0.32	0.39	0.46	0.54	0.61	0.68	0.75	0.82	0.99	1.16	1.33	1.50	1.66	1.83	2.00	2.17	2.34

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:1
 Test Date:2024-03-20

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:6.790m [K=1.0000]
 Remarks:

Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	184.6	184.6	184.6	184.6	184.6	184.6	184.6	184.6
3.0	185.3	189.1	190.7	189.2	184.4	178.9	176.5	179.4
6.0	188.4	194.4	196.0	192.6	184.2	172.5	166.9	173.9
9.0	193.1	202.3	200.2	196.4	185.3	166.4	158.5	169.4
12.0	198.3	210.3	203.9	201.2	188.9	161.0	149.9	165.3
15.0	203.8	218.0	207.0	208.4	194.2	155.9	142.2	160.9
18.0	209.9	224.2	208.7	215.1	199.3	151.4	134.3	156.5
21.0	216.5	229.8	210.3	220.0	204.7	147.3	125.3	152.2
24.0	223.1	235.9	209.6	226.0	210.5	142.7	114.3	147.4
27.0	228.5	241.4	204.3	232.1	217.2	137.1	104.3	142.3
30.0	234.1	245.7	197.7	235.7	223.5	130.1	97.18	135.7
33.0	239.2	246.0	187.6	235.7	228.6	122.3	91.58	128.4
36.0	243.0	243.6	167.9	234.0	216.1	114.9	85.05	121.4
39.0	222.0	239.5	144.6	228.4	217.5	108.7	76.30	115.1
42.0	223.1	229.1	123.9	216.6	220.0	102.4	67.48	108.9
45.0	222.1	208.6	99.23	192.7	221.3	94.68	57.93	101.6
48.0	217.0	183.2	73.44	167.4	199.5	84.88	46.93	92.25
51.0	190.3	160.4	50.79	143.3	193.3	73.92	35.26	81.78
54.0	181.6	125.2	27.24	108.1	184.2	60.94	24.69	69.39
57.0	155.0	91.61	12.00	75.33	156.7	47.07	14.94	54.12
60.0	138.8	58.71	8.827	43.49	141.2	34.97	11.83	40.26
63.0	107.7	34.40	7.919	24.38	109.4	26.28	10.67	30.09
66.0	88.34	19.92	7.071	13.40	79.11	18.46	9.636	20.84
69.0	63.59	10.87	6.501	8.289	46.38	12.72	7.794	13.74
72.0	22.79	7.526	6.267	6.416	12.56	10.15	5.382	10.46
75.0	8.134	5.859	5.850	5.024	5.743	6.765	2.495	7.317
78.0	4.263	4.488	4.982	4.012	3.009	3.910	0.5598	4.568
81.0	3.191	3.824	3.952	3.529	1.907	1.797	0.2192	2.206
84.0	2.704	3.009	2.640	2.756	1.224	1.039	0.2092	1.282
87.0	2.470	1.881	1.083	1.498	0.5742	0.7416	0.1933	0.9711
90.0	2.324	1.711	0.5262	1.455	0.3567	0.5755	0.1774	0.8284

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:1
 Test Date:2024-03-20

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:6.790m [K=1.0000]
 Remarks: