

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	418.8 cd per klm. -24.5 degrees vertical 22.5 degrees horizontal
---	--

Beam Spread	At 10% of Imax	124.1V x 146.8H
	At 50% of Imax	82.3V x 131.2H
	At 90% of Imax	45.9V x 98.2H

Beam Flux	Total	1000.0 lumens per klm.
	To 10% of Imax	978.1 lumens per klm.
	To 50% of Imax	795.3 lumens per klm.
	To 90% of Imax	359.1 lumens per klm.

Upward LOR	0.0 %
Downward LOR	100.0 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:1  
 Test Date:2023-12-14

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.411  
 Humidity:65.0%  
 Test Distance:6.790m [K=1.0000]  
 Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:1416.55x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:一体透镜二代2头-6500K-8AH	DIM.: 410*230	SERIAL No.:
MFR.: EVERFINE	SUR.:170*170	Shielding Angle:

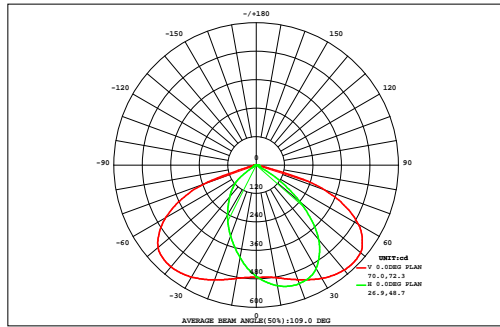

DATA OF LAMP		PHOTOMETRIC DATA	
MODEL	--	Imax(cd)	593.2
NOMINAL POWER(W)	--	AVAILABILITY(%)	97.8
RATED VOLTAGE(V)	--	Avai. FLUX(lm)	1385
NOMINAL FLUX(lm)	1416.55	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1417
TEST VOLTAGE(V)	--	θ @50%(H,V)	131,82DEG

AREA FLUX DIAGRAM																	UNIT:lm		Φ t	Φ a
90	0.00	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.03	0.05	0.06	0.05	0.02	0.46	0.00
80	0.01	0.02	0.04	0.08	0.14	0.19	0.23	0.23	0.17	0.14	0.16	0.15	0.12	0.08	0.07	0.06	0.05	0.02	1.96	0.00
70	0.01	0.03	0.13	0.53	0.79	0.91	1.09	0.97	0.59	0.50	0.71	0.72	0.55	0.46	0.29	0.10	0.05	0.02	8.46	0.60
60	0.01	0.06	0.62	2.00	2.38	2.45	2.73	2.61	2.12	2.03	2.32	2.24	1.84	1.74	1.35	0.33	0.06	0.02	26.9	23.3
50	0.01	0.14	1.72	3.56	4.39	4.40	4.95	5.20	4.79	4.67	4.87	4.51	3.82	3.66	2.85	1.08	0.10	0.02	54.7	54.2
40	0.01	0.33	2.82	5.08	6.38	6.69	6.94	7.23	6.79	6.66	6.83	6.32	6.07	5.72	4.32	2.09	0.18	0.02	80.5	80.1
30	0.01	0.63	3.72	6.50	8.27	9.01	9.03	9.23	8.99	8.85	8.81	8.43	8.40	7.66	5.73	3.01	0.33	0.02	107	106
20	0.01	0.90	4.48	7.79	10.0	11.1	11.4	11.3	11.2	11.1	10.9	11.0	10.6	9.44	7.04	3.76	0.51	0.02	133	132
10	0.01	1.09	5.11	8.97	11.7	13.1	13.6	13.5	13.4	13.3	13.4	13.4	12.8	11.1	8.19	4.35	0.65	0.02	158	157
0	0.01	1.09	5.15	9.24	12.3	14.2	15.0	15.1	15.0	15.1	15.2	15.0	14.0	11.9	8.50	4.40	0.65	0.02	172	172
-10	0.01	0.90	4.60	8.52	11.9	14.3	15.6	16.2	16.1	16.2	16.4	15.7	14.2	11.6	7.86	3.90	0.52	0.02	174	174
-20	0.01	0.63	3.85	7.45	11.0	13.9	15.8	16.3	16.2	16.2	16.6	16.1	14.0	10.8	6.83	3.17	0.33	0.02	169	169
-30	0.01	0.33	2.90	5.96	9.25	12.5	14.5	15.0	14.6	14.7	15.2	14.8	12.6	8.99	5.34	2.20	0.19	0.02	149	149
-40	0.01	0.14	1.75	4.08	6.56	9.13	11.0	11.5	10.8	10.8	11.6	11.2	9.19	6.15	3.48	1.13	0.11	0.02	109	108
-50	0.01	0.07	0.63	2.14	3.32	4.74	5.84	6.02	5.20	5.21	6.02	5.73	4.46	2.86	1.54	0.35	0.07	0.02	54.2	53.3
-60	0.01	0.05	0.16	0.55	0.88	1.31	1.74	1.65	1.03	0.98	1.49	1.51	1.06	0.63	0.33	0.13	0.06	0.02	13.6	6.18
-70	0.01	0.04	0.09	0.16	0.22	0.29	0.37	0.41	0.39	0.38	0.37	0.32	0.25	0.19	0.15	0.10	0.06	0.02	3.79	0.00
-80	0.00	0.02	0.05	0.09	0.13	0.16	0.17	0.17	0.17	0.16	0.16	0.14	0.12	0.10	0.09	0.08	0.06	0.02	1.91	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Φ t	0.17	6.49	37.9	72.7	99.7	118	130	133	128	127	131	127	114	93.0	64.0	30.3	4.02	0.40	1417	---
Φ a	0.00	5.14	36.7	71.5	98.1	116	128	130	125	124	129	125	112	91.4	62.6	28.8	2.25	0.00	---	1385


one-half-peak spread: U:28.0,D:54.8 , L:44.8, NEMA Beam Type: Type 7 x 6 (H x V)

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:1  
 Test Date:2023-12-14

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.411  
 Humidity:65.0%  
 Test Distance:6.790m [K=1.0000]  
 Remarks:

**ISOCANDELA DIAGRAM**

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:1416.55x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 一体透镜二代2头-6500K-8AH	DIM.: 410*230	SERIAL No.:
MFR.: EVERFINE	SUR.:170*170	Shielding Angle:

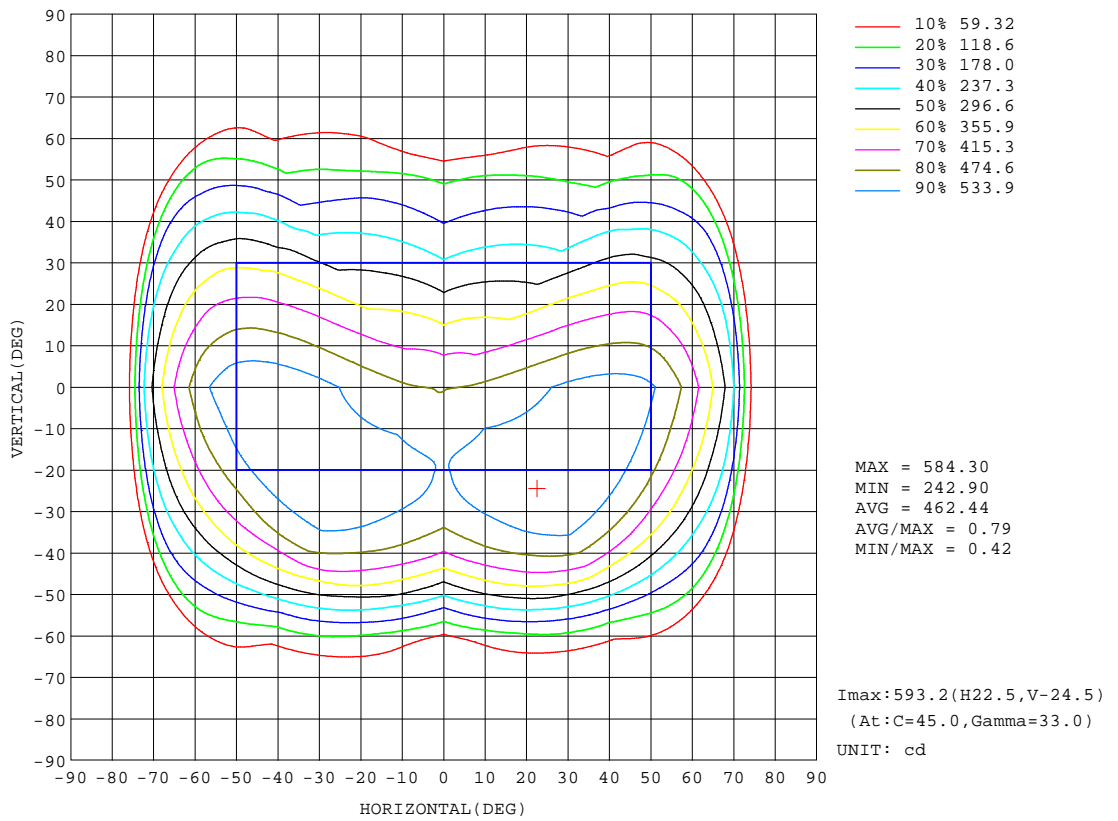


C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:1  
 Test Date:2023-12-14

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.411  
 Humidity:65.0%  
 Test Distance:6.790m [K=1.0000]  
 Remarks:

**ISOLUX DIAGRAM**


Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:1416.55x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:一体透镜二代2头-6500K-8AH	DIM.: 410*230	SERIAL No.:
MFR.: EVERFINE	SUR.:170*170	Shielding Angle:

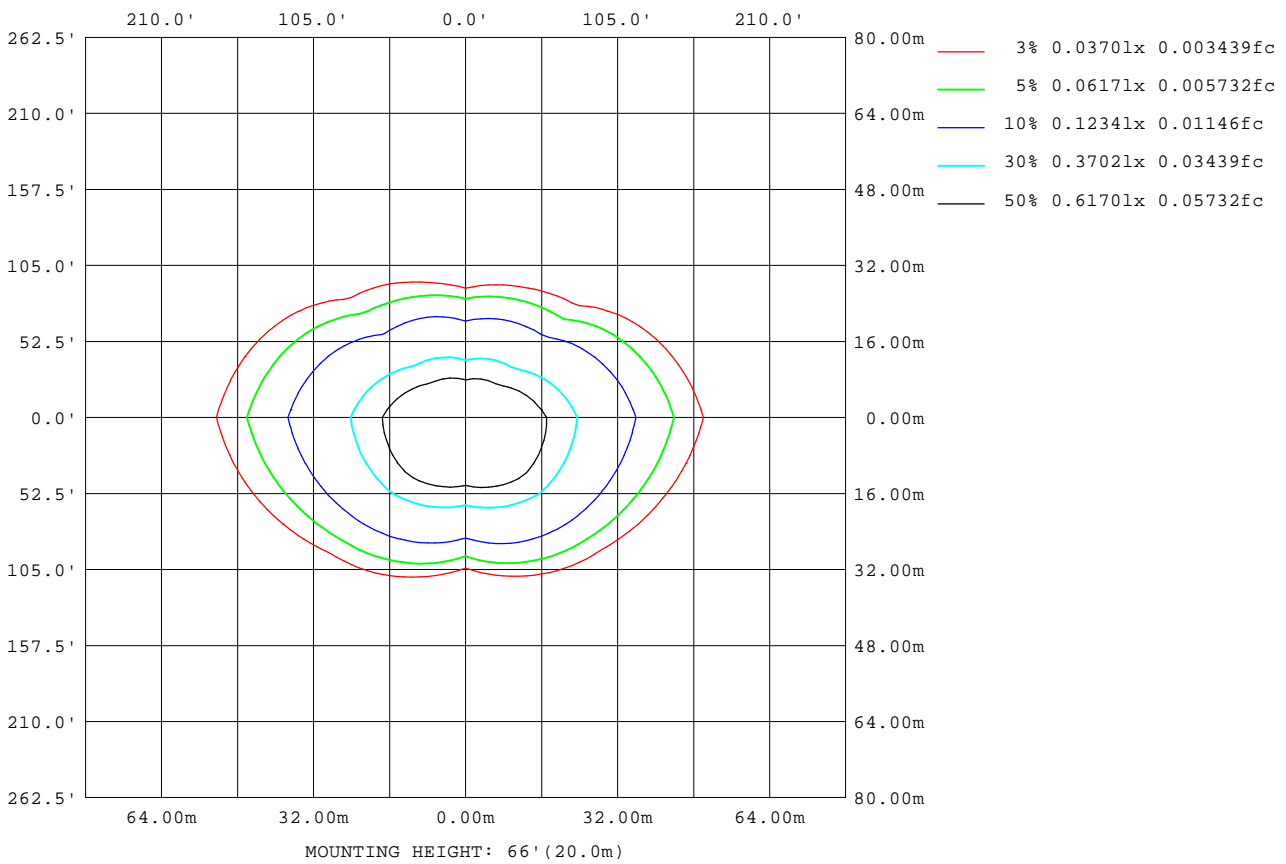

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:1  
 Test Date:2023-12-14

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.411  
 Humidity:65.0%  
 Test Distance:6.790m [K=1.0000]  
 Remarks:

Planar Illuminance Curve

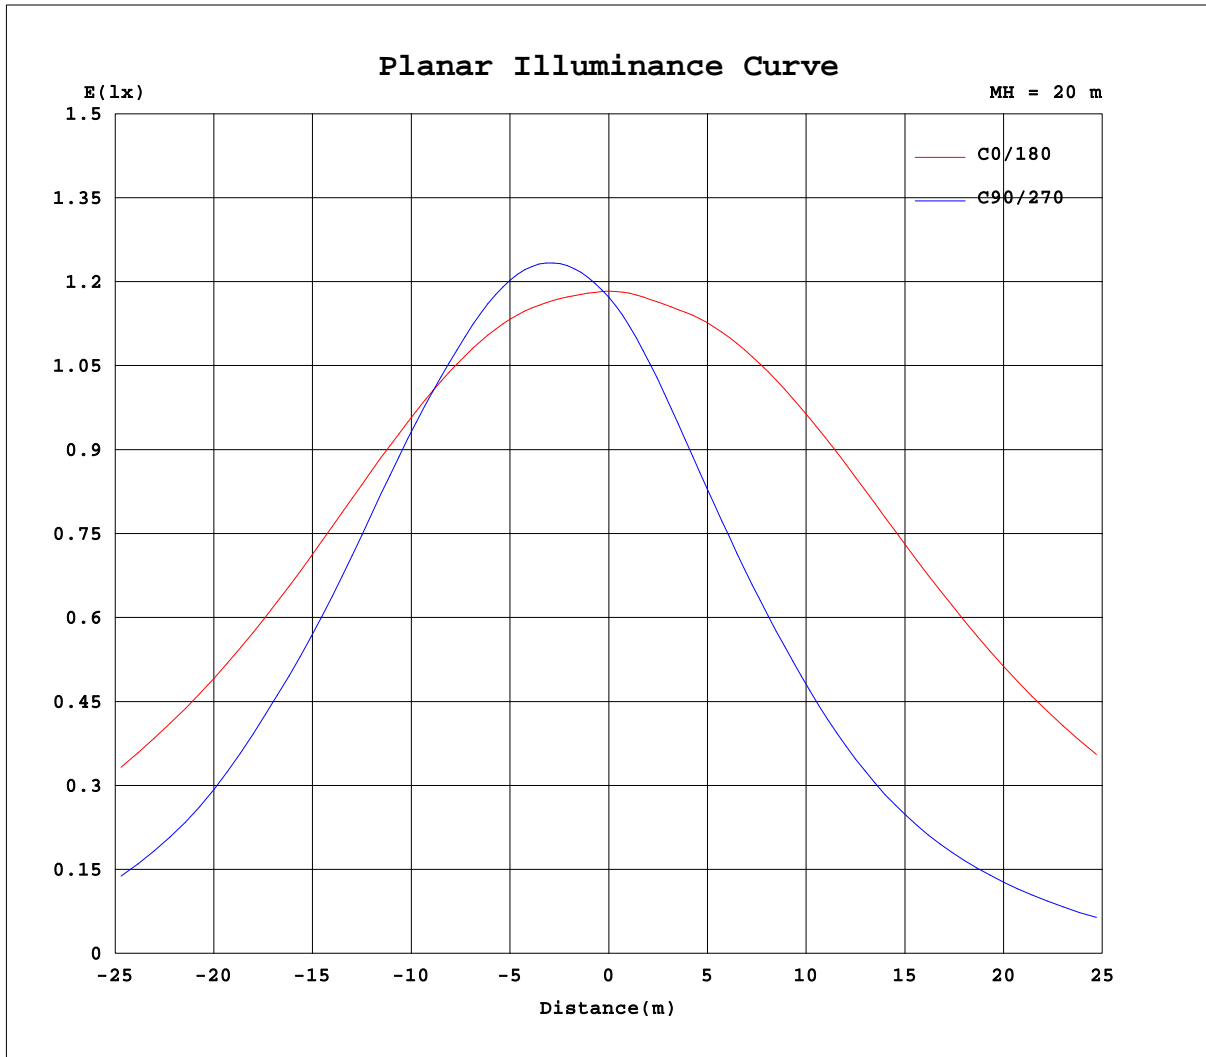


C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: 1  
 Test Date: 2023-12-14

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.411  
 Humidity: 65.0%  
 Test Distance: 6.790m [K=1.0000]  
 Remarks:

AAI Figure

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:1416.55x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:一体透镜二代2头-6500K-8AH	DIM.: 410*230	SERIAL No.:
MFR.: EVERFINE	SUR.:170*170	Shielding Angle:

Flux out:730.5 lm

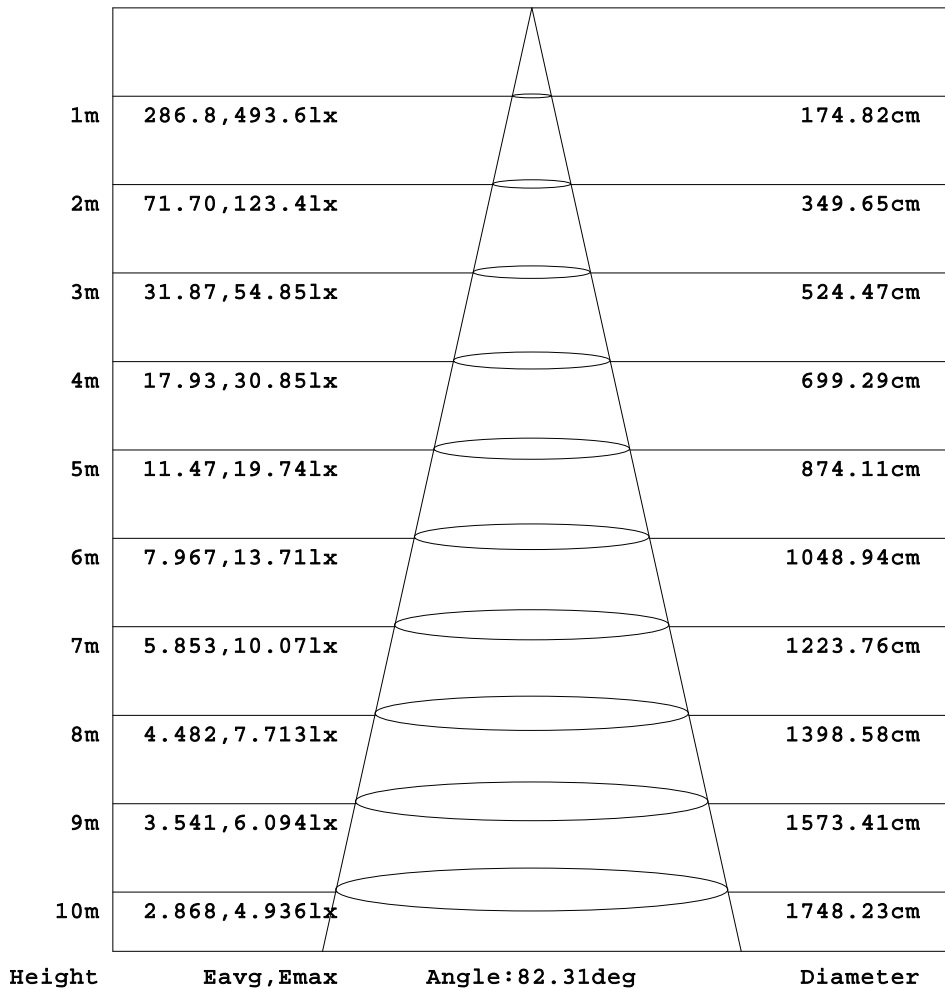

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:1  
 Test Date:2023-12-14

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.411  
 Humidity:65.0%  
 Test Distance:6.790m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:1416.55x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:一体透镜二代2头-6500K-8AH	DIM.: 410*230	SERIAL No.:
MFR.: EVERFINE	SUR.:170*170	Shielding Angle:

Table--1

UNIT: cd

H( DEG) V( DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.83	1.02	1.20	1.39	1.57	1.76	1.95	2.13	2.32	2.50	2.36	2.21	2.06	1.92	1.77	1.62	1.48	1.33	1.19
-85	0.83	1.54	2.21	2.76	3.31	3.90	4.52	5.21	5.91	6.63	6.69	6.68	6.62	6.53	6.40	6.25	6.06	5.84	5.57
-80	0.83	2.06	2.91	3.73	4.64	5.62	6.62	7.55	8.39	9.12	9.10	9.09	9.14	9.25	9.41	9.57	9.71	9.83	9.89
-75	0.83	2.41	3.44	4.53	5.67	6.75	7.70	8.61	9.50	9.87	10.1	10.6	11.2	12.0	12.5	12.8	12.9	12.7	12.4
-70	0.83	2.68	3.88	5.16	6.38	7.70	9.89	12.4	13.9	14.1	15.5	18.6	21.1	22.9	23.8	23.1	20.8	17.2	12.9
-65	0.83	2.92	4.27	5.65	7.28	11.2	16.7	24.2	38.0	38.1	36.3	47.3	56.1	60.1	59.2	53.5	43.4	30.2	15.4
-60	0.83	3.09	4.58	6.16	10.1	18.7	37.2	72.5	83.6	84.5	88.6	108	119	121	117	108	94.3	75.9	52.3
-55	0.83	3.25	4.83	7.14	15.9	34.8	94.3	124	138	153	167	190	206	213	214	207	192	172	145
-50	0.83	3.39	5.09	9.42	24.7	83.9	147	176	203	228	257	281	298	306	311	308	293	271	242
-45	0.83	3.51	5.34	13.2	39.9	143	193	233	269	307	338	365	395	407	404	394	379	359	332
-40	0.83	3.62	5.66	18.0	76.7	188	242	289	334	373	407	455	474	476	473	465	453	434	411
-35	0.83	3.70	6.12	23.9	127	226	288	341	390	428	477	507	529	530	524	514	500	484	465
-30	0.83	3.75	6.83	30.7	173	263	331	388	435	482	517	540	559	566	555	543	531	519	505
-25	0.83	3.78	7.55	40.4	209	299	369	429	473	519	543	561	573	579	571	557	546	535	525
-20	0.83	3.81	8.72	50.8	236	330	403	462	507	541	559	571	576	575	572	559	547	538	531
-15	0.83	3.81	9.68	66.0	259	357	432	489	533	556	569	574	572	566	558	554	540	531	529
-10	0.83	3.80	10.4	78.1	278	380	457	511	551	567	574	573	565	554	543	533	525	516	516
-5	0.83	3.78	10.9	86.5	294	400	478	530	564	574	576	570	558	542	527	513	501	496	495
0	0.83	3.74	11.0	90.9	307	416	496	546	574	581	577	567	552	533	514	497	482	475	473
5	0.83	3.71	10.8	86.5	294	397	470	516	539	543	538	527	511	493	475	460	449	441	436
10	0.83	3.67	10.2	78.1	277	375	442	483	503	506	499	487	471	454	437	422	410	408	396
15	0.83	3.61	9.36	66.0	258	350	411	449	466	468	460	447	431	413	397	380	378	371	356
20	0.83	3.55	8.28	50.8	235	322	378	414	427	429	419	406	390	371	352	348	344	334	318
25	0.83	3.47	6.97	40.4	208	291	344	376	387	386	378	362	345	326	317	315	309	298	281
30	0.83	3.39	6.10	30.5	173	256	307	334	346	342	334	318	298	285	285	281	273	260	243
35	0.83	3.30	5.24	23.6	126	222	268	293	304	298	284	271	249	252	252	247	238	224	207
40	0.83	3.19	4.63	17.4	76.6	186	227	250	257	254	238	216	215	219	218	213	204	191	174
45	0.83	3.06	4.17	12.1	39.8	143	185	206	212	205	192	170	175	180	183	179	171	159	145
50	0.83	2.93	3.82	7.98	24.2	83.7	145	161	165	158	142	136	138	139	139	138	133	123	111
55	0.83	2.79	3.50	5.33	14.6	34.7	93.7	119	119	112	95.3	99.0	99.4	97.7	92.3	84.9	76.6	66.1	52.3
60	0.83	2.65	3.24	4.05	8.04	17.8	37.1	71.8	79.6	68.9	57.0	64.5	67.6	66.7	62.0	53.5	42.8	30.4	16.9
65	0.83	2.51	2.99	3.39	4.54	8.75	15.4	24.1	37.6	36.6	30.8	35.1	37.7	38.5	36.8	32.8	26.8	19.2	10.8
70	0.83	2.31	2.72	2.96	3.26	4.14	6.54	9.90	12.9	13.9	14.7	16.5	17.9	18.7	18.1	16.6	14.1	10.9	7.26
75	0.83	2.08	2.44	2.59	2.66	2.75	3.00	3.63	4.66	5.52	6.41	7.23	7.80	7.84	7.52	6.95	6.07	4.98	3.74
80	0.83	1.77	2.12	2.21	2.20	2.14	2.04	1.94	1.86	1.78	1.90	2.00	2.12	2.14	2.18	2.12	1.97	1.74	1.43
85	0.83	1.29	1.64	1.74	1.72	1.64	1.50	1.34	1.15	0.95	0.91	0.87	0.82	0.76	0.69	0.61	0.52	0.43	0.34
90	0.83	0.82	0.80	0.78	0.77	0.75	0.73	0.72	0.70	0.69	0.64	0.60	0.56	0.52	0.48	0.44	0.40	0.36	0.32

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:1  
 Test Date:2023-12-14

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.411  
 Humidity:65.0%  
 Test Distance:6.790m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:1416.55x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 一体透镜二代2头-6500K-8AH	DIM.: 410*230	SERIAL No.:
MFR.: EVERFINE	SUR.:170*170	Shielding Angle:

Table--2

UNIT: cd

H( DEG) V( DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	1.46	1.73	2.00	2.28	2.55	2.82	3.10	3.37	3.64	4.37	5.11	5.84	6.57	7.30	8.03	8.76	9.49	10.2
-85	5.52	5.43	5.30	5.13	4.91	4.66	4.37	4.12	3.91	4.21	4.62	5.18	5.81	6.53	7.34	8.22	9.19	10.2
-80	9.68	9.44	9.17	8.91	8.69	8.46	8.26	8.00	7.70	7.28	6.87	6.50	6.26	6.36	6.88	7.78	8.90	10.2
-75	12.2	12.0	11.7	11.1	10.6	10.1	9.37	8.72	8.41	8.52	8.41	8.15	7.77	7.37	7.00	7.45	8.65	10.2
-70	15.8	18.2	19.5	19.6	18.6	16.8	14.4	11.7	10.6	10.8	9.78	8.88	8.45	8.13	7.76	7.40	8.43	10.2
-65	28.2	39.3	47.0	51.0	50.5	45.3	36.7	27.5	25.4	20.9	15.9	12.1	9.48	8.50	8.18	7.66	8.23	10.2
-60	74.5	91.3	103	111	114	107	92.6	73.1	66.4	58.9	37.4	21.3	13.2	9.23	8.40	8.15	8.09	10.2
-55	173	193	206	211	208	197	178	150	129	113	89.9	46.6	21.5	11.7	8.60	8.32	7.95	10.2
-50	271	294	309	316	315	297	275	243	209	173	144	101	38.5	16.5	9.20	8.42	7.94	10.2
-45	361	383	399	409	410	400	377	327	287	242	196	156	77.2	24.3	10.6	8.48	8.01	10.2
-40	437	457	471	481	485	482	456	411	354	306	253	201	131	36.7	12.9	8.51	8.07	10.2
-35	487	505	520	533	540	541	511	471	421	362	305	243	178	57.0	16.0	8.57	8.16	10.2
-30	522	537	551	565	578	568	544	513	469	410	351	286	217	88.0	19.9	8.69	8.31	10.2
-25	538	552	566	583	590	579	563	539	504	453	391	324	248	126	24.8	8.83	8.44	10.2
-20	541	553	569	584	584	580	570	553	527	484	423	355	275	160	29.6	9.20	8.56	10.2
-15	535	547	563	567	572	574	571	561	541	506	450	383	300	188	34.7	9.50	8.66	10.2
-10	520	534	541	548	557	565	567	563	549	522	472	406	322	210	38.8	9.74	8.73	10.2
-5	501	507	518	530	543	555	561	562	554	533	488	425	341	227	41.7	9.90	8.80	10.2
0	476	485	499	515	531	545	555	560	556	540	500	439	355	238	43.4	9.97	8.84	10.2
5	434	445	457	471	487	501	513	519	518	506	471	416	337	226	41.7	9.79	8.75	10.2
10	403	400	414	428	443	458	470	478	480	470	439	389	316	209	38.7	9.51	8.65	10.2
15	366	368	366	382	399	415	427	437	441	433	404	359	291	187	34.5	9.16	8.54	10.2
20	330	334	333	333	352	369	383	395	401	394	368	327	265	159	29.4	8.73	8.41	10.2
25	293	299	300	298	303	322	338	352	359	352	331	293	238	124	24.5	8.23	8.27	10.2
30	256	264	267	266	260	272	292	307	315	307	291	257	208	86.7	19.3	7.97	8.11	10.2
35	220	229	233	233	229	223	245	262	268	264	249	219	172	56.1	15.3	7.74	7.95	10.2
40	186	195	199	201	198	191	197	214	219	219	207	183	128	36.1	11.9	7.59	7.84	10.2
45	155	163	167	168	166	159	147	161	173	173	164	145	74.7	23.7	9.31	7.50	7.78	10.2
50	121	127	130	129	124	114	109	114	124	128	126	96.1	37.3	15.3	7.65	7.44	7.71	10.2
55	62.7	69.3	73.5	77.0	79.5	79.5	73.5	66.3	80.6	89.7	82.0	44.1	20.5	9.97	6.83	7.39	7.72	10.2
60	27.2	36.2	43.3	47.6	48.5	46.1	41.2	34.5	46.8	50.8	34.3	20.1	11.3	6.98	6.56	7.34	7.84	10.2
65	15.7	19.9	23.1	24.6	24.6	23.2	20.5	17.2	19.7	18.6	14.4	9.70	6.70	5.87	6.46	6.97	7.98	10.2
70	8.89	10.3	11.2	11.5	11.2	10.6	9.92	9.07	8.51	7.74	6.33	5.21	5.05	5.61	6.41	6.81	8.17	10.2
75	4.33	4.81	5.15	5.30	5.23	4.88	4.37	3.77	3.28	3.33	3.54	4.04	4.72	5.51	5.99	6.90	8.38	10.2
80	1.53	1.58	1.58	1.54	1.45	1.47	1.47	1.48	1.53	2.22	2.96	3.75	4.39	5.11	6.04	7.23	8.61	10.2
85	0.43	0.51	0.59	0.67	0.74	0.80	0.86	0.91	0.99	1.79	2.61	3.49	4.42	5.41	6.49	7.64	8.89	10.2
90	0.37	0.43	0.48	0.53	0.59	0.64	0.69	0.75	0.80	1.85	2.90	3.94	4.99	6.04	7.08	8.13	9.18	10.2

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:1  
 Test Date:2023-12-14

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.411  
 Humidity:65.0%  
 Test Distance:6.790m [K=1.0000]  
 Remarks:

Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	470.3	470.3	470.3	470.3	470.3	470.3	470.3	470.3
3.0	470.8	481.4	486.4	482.4	470.8	458.1	451.5	456.9
6.0	473.9	494.5	501.0	495.1	472.2	444.6	429.4	442.4
9.0	479.6	508.8	513.5	507.3	476.6	431.2	405.2	428.0
12.0	487.4	523.2	523.4	520.0	484.2	418.0	380.6	412.6
15.0	496.1	537.5	529.9	533.4	493.4	404.3	356.7	396.9
18.0	505.3	550.9	533.0	546.7	503.7	390.2	333.3	381.3
21.0	514.7	562.1	531.7	558.0	514.4	376.6	310.9	365.9
24.0	524.2	572.7	528.4	567.3	525.5	362.7	288.7	349.1
27.0	533.1	581.6	521.0	575.2	537.1	348.0	266.2	332.1
30.0	541.8	588.5	506.2	581.4	548.1	332.9	243.5	316.0
33.0	548.0	591.7	483.4	584.8	557.5	317.9	221.6	299.2
36.0	552.9	588.8	455.9	582.6	565.8	302.3	200.6	280.9
39.0	555.6	580.0	424.0	573.8	571.9	284.2	181.2	261.2
42.0	555.8	563.1	383.5	557.1	576.0	264.9	162.9	241.0
45.0	552.5	537.6	332.6	531.2	576.8	245.7	145.0	221.7
48.0	545.8	502.4	279.3	498.6	574.3	225.2	126.1	201.0
51.0	530.8	452.3	223.0	454.1	567.8	195.4	104.1	179.7
54.0	506.6	391.7	163.3	381.1	549.6	175.0	66.25	156.4
57.0	475.7	312.3	111.1	321.0	526.4	152.4	29.49	124.9
60.0	436.5	243.6	52.46	256.4	492.5	124.0	16.99	99.76
63.0	390.1	170.2	19.05	183.3	449.3	98.53	13.27	70.32
66.0	331.3	100.5	14.68	119.6	395.8	70.93	10.10	45.09
69.0	269.6	50.24	13.23	65.35	327.1	45.28	7.850	26.84
72.0	146.6	22.28	12.71	29.88	248.4	27.29	5.902	14.74
75.0	43.11	11.12	12.43	15.22	90.36	14.85	3.750	9.250
78.0	16.22	8.641	11.56	10.28	24.52	7.827	2.429	4.539
81.0	8.754	8.385	9.026	9.458	7.097	3.211	0.6060	2.061
84.0	8.684	6.664	6.601	8.879	4.058	1.382	0.3532	1.257
87.0	8.276	3.530	3.417	6.070	3.018	0.8710	0.3334	0.9472
90.0	10.16	3.632	1.188	2.519	0.8271	0.6832	0.3214	0.8063

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: 1  
 Test Date: 2023-12-14

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.411  
 Humidity: 65.0%  
 Test Distance: 6.790m [K=1.0000]  
 Remarks: