

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	479.7 cd per klm. 0.0 degrees vertical 3.0 degrees horizontal
---	---

Beam Spread	At 10% of Imax	134.5V x 143.6H
	At 50% of Imax	89.8V x 102.2H
	At 90% of Imax	25.4V x 43.4H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	973.0 lumens per klm.
	To 50% of Imax	701.1 lumens per klm.
	To 90% of Imax	130.9 lumens per klm.

Upward LOR	0.0 %
Downward LOR	100.0 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:1
 Test Date:2025-12-16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:6.790m [K=1.0000]
 Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:2041.67x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:一体二代反光4头-6500K-15AH-高亮	DIM.: 0.620*0.250	SERIAL No.:
MFR.: EVERFINE	SUR.:0.360*0.170	Shielding Angle:

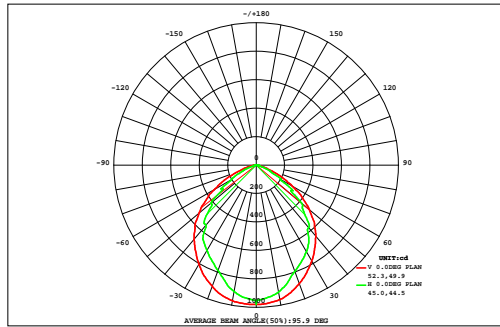

DATA OF LAMP		PHOTOMETRIC DATA	
MODEL	--	Imax(cd)	979.3
NOMINAL POWER(W)		AVAILABILITY(%)	97.2
RATED VOLTAGE(V)		Avai. FLUX(lm)	1985
NOMINAL FLUX(lm)	2041.67	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	2042
TEST VOLTAGE(V)	--	θ @50%(H,V)	102,90DEG

AREA FLUX DIAGRAM																	UNIT:lm		Φ t	Φ a
90	0.00	0.02	0.03	0.05	0.07	0.08	0.09	0.10	0.10	0.10	0.11	0.10	0.09	0.08	0.08	0.06	0.04	0.02	1.23	0.00
80	0.01	0.03	0.08	0.15	0.25	0.41	0.56	0.66	0.70	0.71	0.71	0.62	0.47	0.30	0.21	0.12	0.06	0.02	6.04	0.00
70	0.01	0.05	0.17	0.51	1.11	1.96	2.88	3.60	3.92	3.96	3.73	3.07	2.15	1.30	0.70	0.29	0.09	0.02	29.5	18.8
60	0.01	0.08	0.44	1.36	2.97	4.99	6.95	8.38	9.04	9.11	8.54	7.19	5.29	3.31	1.68	0.66	0.15	0.02	70.2	66.8
50	0.01	0.14	0.85	2.63	5.42	8.56	11.4	13.7	14.7	14.8	13.8	11.6	8.91	5.86	3.07	1.15	0.26	0.03	117	115
40	0.02	0.23	1.34	4.02	7.82	11.7	15.1	17.6	19.1	19.1	17.6	15.2	12.0	8.31	4.55	1.73	0.38	0.03	156	154
30	0.02	0.32	1.84	5.27	9.76	14.2	17.6	20.4	22.2	22.2	20.4	17.7	14.5	10.3	5.84	2.30	0.50	0.04	185	184
20	0.02	0.39	2.25	6.21	11.2	16.0	20.0	23.2	25.5	25.5	23.2	20.3	16.5	11.8	6.85	2.77	0.60	0.04	212	211
10	0.02	0.43	2.50	6.78	12.1	17.4	22.2	26.2	28.3	28.2	26.5	22.7	18.0	12.8	7.48	3.06	0.67	0.04	235	235
0	0.02	0.43	2.51	6.78	12.1	17.4	22.2	26.2	28.2	28.5	26.7	22.9	18.1	12.8	7.51	3.08	0.67	0.04	236	235
-10	0.02	0.39	2.26	6.23	11.2	16.1	20.1	23.3	25.6	25.8	23.9	20.7	16.7	11.9	6.93	2.80	0.60	0.04	215	214
-20	0.02	0.32	1.86	5.32	9.79	14.2	17.7	20.5	22.4	22.6	21.0	18.3	14.8	10.5	5.97	2.35	0.51	0.04	188	187
-30	0.02	0.23	1.35	4.09	7.89	11.7	15.1	17.7	19.2	19.3	18.0	15.6	12.4	8.58	4.72	1.78	0.39	0.03	158	157
-40	0.01	0.15	0.86	2.70	5.56	8.70	11.5	13.7	14.8	14.9	14.0	12.0	9.34	6.21	3.24	1.20	0.27	0.03	119	117
-50	0.01	0.09	0.46	1.40	3.10	5.15	7.06	8.38	8.95	9.06	8.73	7.52	5.70	3.62	1.82	0.71	0.16	0.02	71.9	68.6
-60	0.01	0.06	0.19	0.55	1.16	2.04	2.97	3.61	3.84	3.93	3.83	3.30	2.43	1.50	0.80	0.33	0.10	0.02	30.7	20.2
-70	0.01	0.04	0.10	0.19	0.31	0.48	0.65	0.77	0.82	0.86	0.87	0.78	0.62	0.42	0.27	0.15	0.07	0.02	7.43	0.00
-80	0.01	0.03	0.06	0.10	0.14	0.17	0.19	0.21	0.21	0.22	0.23	0.22	0.20	0.17	0.14	0.10	0.06	0.02	2.48	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Φ t	0.24	3.44	19.2	54.3	102	151	194	228	248	249	232	200	158	110	61.8	24.6	5.59	0.52	2042	---
Φ a	0.00	0.00	14.7	50.7	98.6	148	191	225	244	246	229	197	155	106	58.2	20.5	1.31	0.00	---	1985


one-half-peak spread: U:44.9,D:45.3 , L:49.2,R:49.5 NEMA Beam Type: Type 7

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:1
 Test Date:2025-12-16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:6.790m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:2041.67x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 一体二代反光4头-6500K-15AH-高亮	DIM.: 0.620*0.250	SERIAL No.:
MFR.: EVERFINE	SUR.: 0.360*0.170	Shielding Angle:

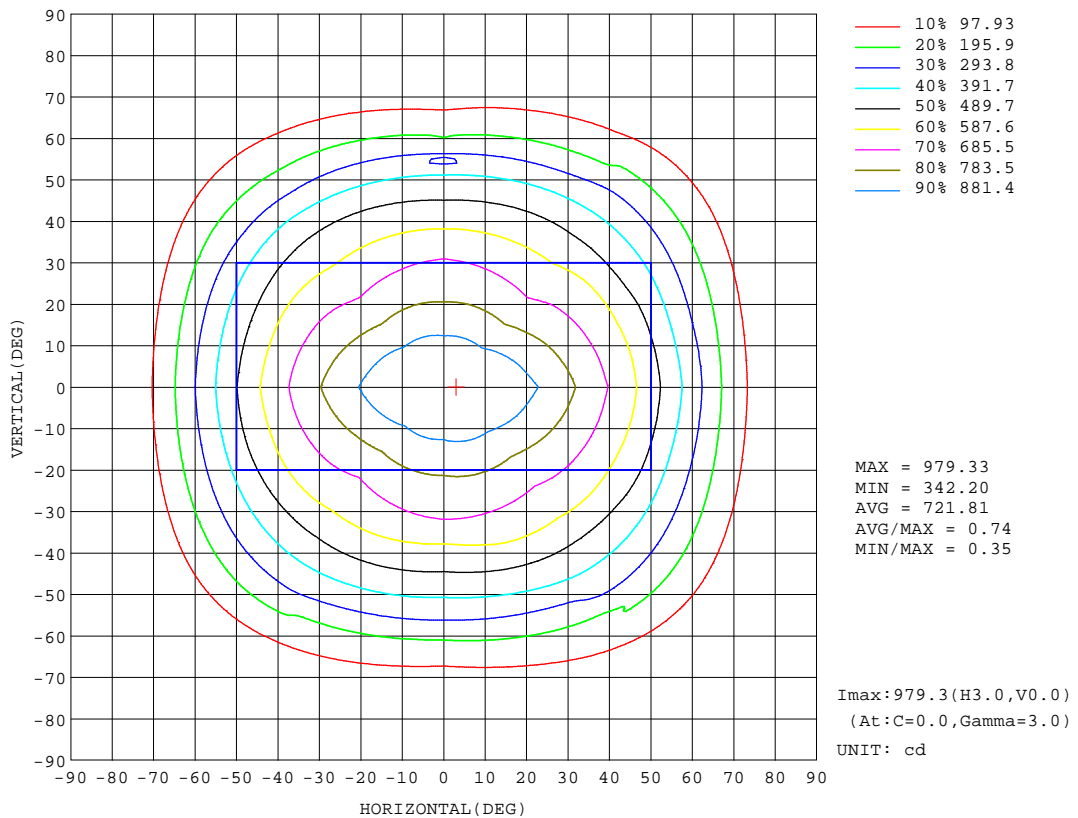


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:1
 Test Date:2025-12-16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:6.790m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM


Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:2041.67x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 一体二代反光4头-6500K-15AH-高亮	DIM.: 0.620*0.250	SERIAL No.:
MFR.: EVERFINE	SUR.: 0.360*0.170	Shielding Angle:

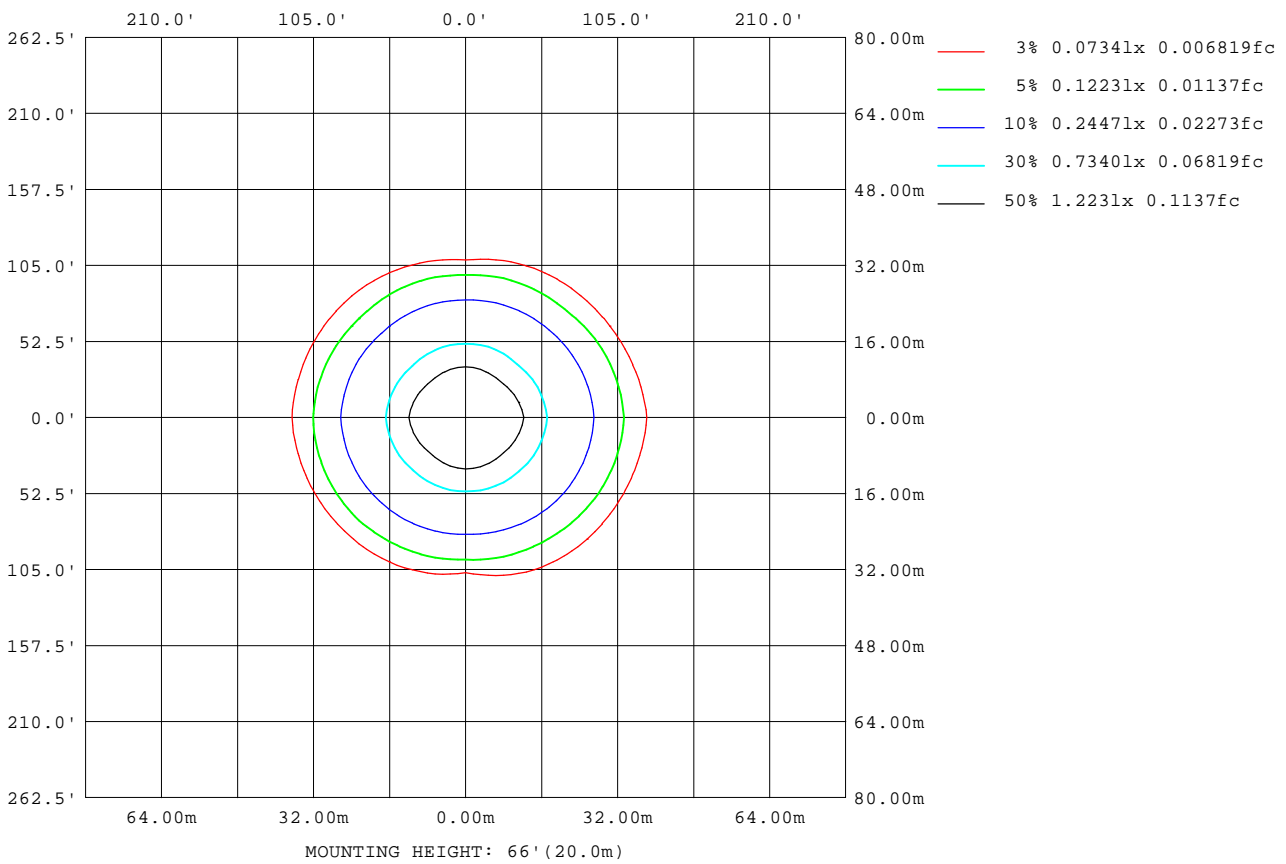

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: 1
 Test Date: 2025-12-16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity: 65.0%
 Test Distance: 6.790m [K=1.0000]
 Remarks:

Planar Illuminance Curve

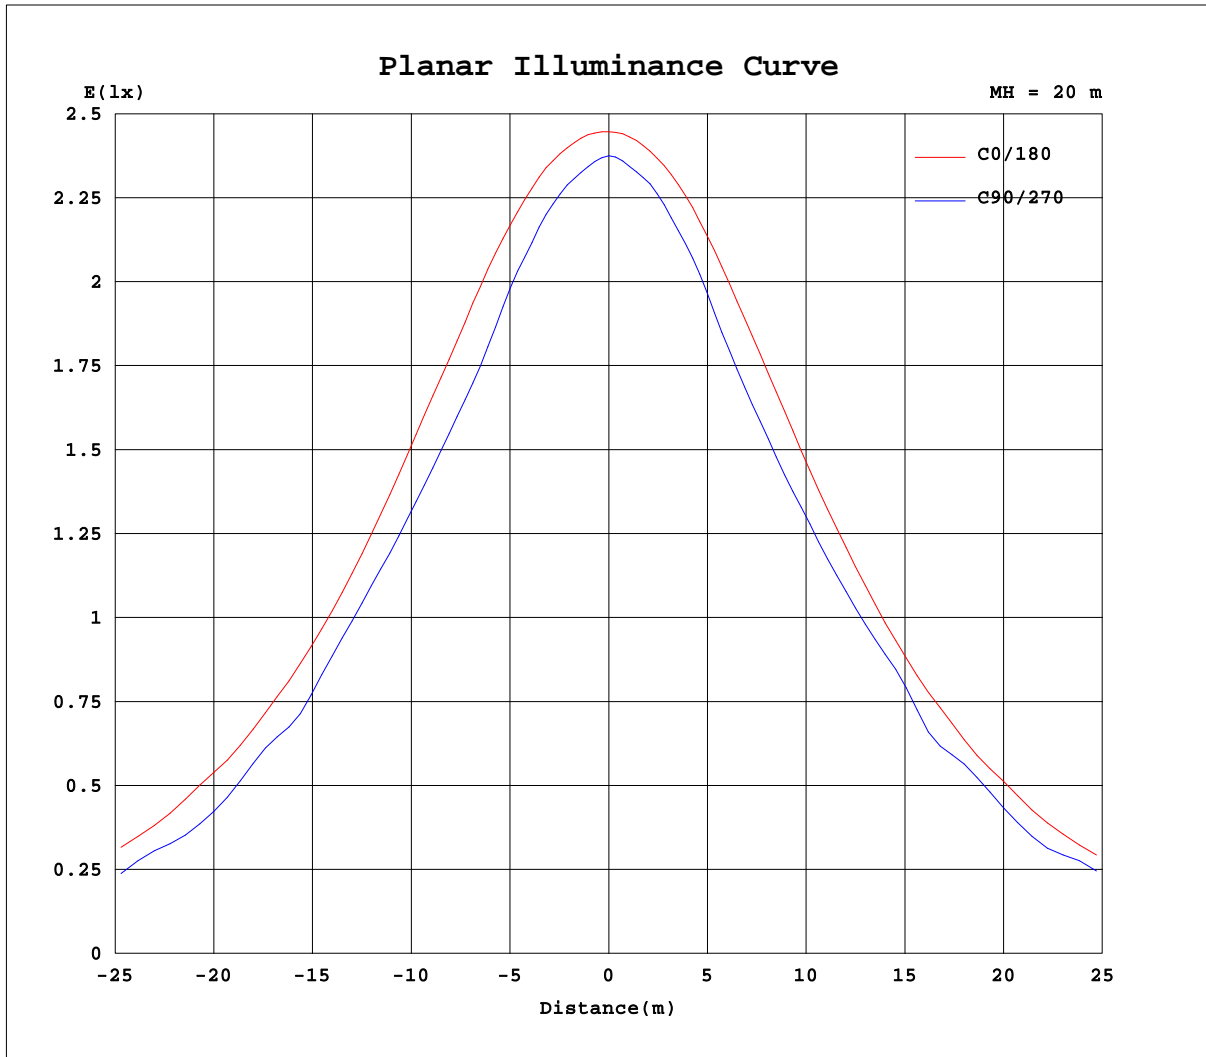


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: 1
 Test Date: 2025-12-16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity: 65.0%
 Test Distance: 6.790m [K=1.0000]
 Remarks:

AAI Figure

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:2041.67x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 一体二代反光4头-6500K-15AH-高亮	DIM.: 0.620*0.250	SERIAL No.:
MFR.: EVERFINE	SUR.:0.360*0.170	Shielding Angle:

Flux out:1315 lm

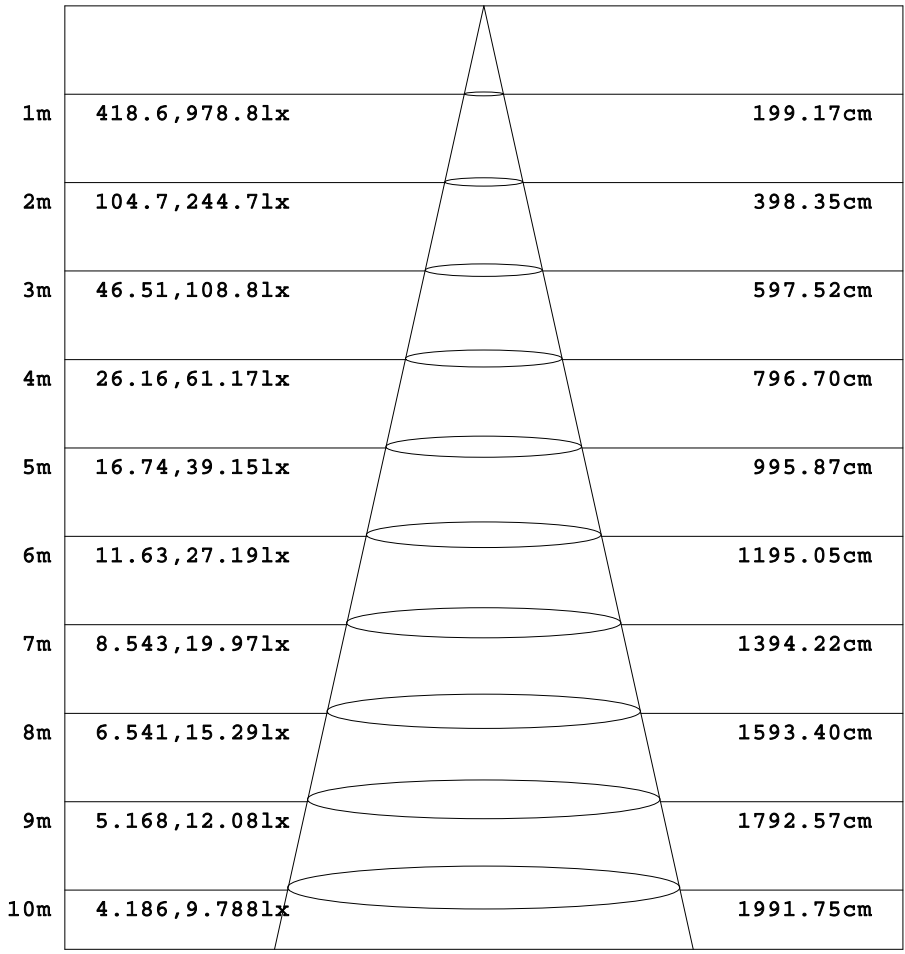

Height Eavg, Emax Angle:89.76deg Diameter

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:1
 Test Date:2025-12-16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:6.790m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:2041.67x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 一体二代反光4头-6500K-15AH-高亮	DIM.: 0.620*0.250	SERIAL No.:
MFR.: EVERFINE	SUR.: 0.360*0.170	Shielding Angle:

Table--1

UNIT: cd

H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	1.58	2.04	2.50	2.96	3.42	3.88	4.33	4.79	5.25	5.71	5.53	5.36	5.18	5.01	4.83	4.66	4.48	4.31	4.13
-85	1.58	2.13	2.64	3.19	3.76	4.34	4.94	5.49	6.04	6.56	6.60	6.64	6.69	6.72	6.72	6.70	6.65	6.58	6.48
-80	1.58	2.21	2.93	3.80	4.75	5.72	6.68	7.52	8.28	8.94	9.39	9.80	10.2	10.7	11.1	11.5	11.8	12.0	12.1
-75	1.58	2.34	3.40	4.76	6.24	7.63	8.96	10.3	11.5	12.6	14.0	16.2	19.0	21.4	22.7	22.8	22.1	21.0	19.5
-70	1.58	2.49	4.03	5.98	7.91	9.96	12.3	15.2	20.2	27.1	32.7	37.2	43.1	50.1	56.5	62.1	66.4	68.8	69.2
-65	1.58	2.67	4.78	7.25	9.94	13.6	19.5	30.7	40.2	51.8	63.4	77.9	95.0	108	114	116	118	116	111
-60	1.58	2.93	5.59	8.63	12.8	20.6	35.8	50.3	67.6	88.3	116	132	163	176	184	200	206	205	201
-55	1.58	3.17	6.40	10.3	17.4	34.4	53.0	75.7	109	136	189	197	228	256	276	299	313	317	317
-50	1.58	3.45	7.20	12.4	25.5	47.7	74.2	113	153	205	231	291	315	334	350	380	402	414	417
-45	1.58	3.75	7.97	15.2	36.3	63.4	100	148	210	254	316	341	387	430	446	458	473	480	479
-40	1.58	4.02	8.80	18.8	46.0	79.5	131	200	248	322	360	422	451	484	520	549	569	574	575
-35	1.58	4.27	9.64	23.6	55.5	97.6	160	225	309	361	431	466	515	554	581	599	622	638	646
-30	1.58	4.52	10.5	29.4	65.5	119	195	266	346	416	472	529	569	598	631	658	681	696	705
-25	1.58	4.73	11.4	35.0	75.2	137	222	306	378	460	518	575	614	642	669	698	725	742	750
-20	1.58	4.90	12.2	39.9	83.3	154	237	336	413	489	561	613	655	685	706	738	773	792	795
-15	1.58	5.03	12.9	43.6	90.6	169	258	359	446	518	592	647	693	727	758	791	826	847	855
-10	1.58	5.12	13.5	46.5	96.5	181	275	374	467	548	620	677	727	770	812	849	873	898	906
-5	1.58	5.17	13.8	48.4	101	189	287	386	480	568	639	700	757	807	856	895	922	926	934
0	1.58	5.17	13.9	49.4	103	192	293	393	487	580	651	717	780	836	887	929	959	974	979
5	1.58	5.13	13.7	48.3	101	188	287	386	478	569	638	700	756	807	855	897	927	935	935
10	1.58	5.06	13.4	46.3	96.5	181	276	374	464	551	618	676	726	770	809	851	876	902	901
15	1.58	4.94	12.8	43.3	90.4	169	260	356	444	523	590	645	691	726	757	787	827	845	847
20	1.58	4.77	12.0	39.4	83.0	153	236	328	415	488	560	609	652	681	705	736	767	786	788
25	1.58	4.57	11.1	34.4	74.2	135	215	299	383	449	527	571	608	638	664	694	720	734	739
30	1.58	4.33	10.2	28.6	64.7	118	190	269	342	415	469	533	563	592	629	654	673	686	694
35	1.58	4.05	9.26	23.0	55.1	97.4	160	223	294	366	421	471	520	549	570	601	628	642	649
40	1.58	3.76	8.36	18.3	45.3	78.9	128	190	254	304	369	409	446	496	524	547	554	553	550
45	1.58	3.46	7.48	14.6	34.8	61.8	99.6	147	195	259	293	349	388	415	438	463	481	490	491
50	1.58	3.14	6.64	11.7	24.2	47.2	73.0	110	151	186	240	266	309	334	359	386	404	414	417
55	1.58	2.83	5.79	9.52	16.5	32.3	51.8	74.9	106	135	170	193	234	248	271	298	304	297	289
60	1.58	2.56	4.93	7.74	11.7	19.3	33.5	48.8	65.7	87.2	109	131	155	168	187	202	205	203	197
65	1.58	2.27	4.07	6.26	8.75	12.3	17.8	27.4	39.3	48.2	61.3	76.7	92.6	103	110	116	122	123	120
70	1.58	2.07	3.27	4.91	6.57	8.42	10.6	13.4	16.8	22.6	30.2	35.7	39.0	43.6	51.1	57.2	61.7	64.2	64.3
75	1.58	1.91	2.58	3.60	4.77	5.87	6.95	8.09	9.17	10.1	11.5	13.2	14.8	17.1	18.5	19.3	19.1	18.2	16.8
80	1.58	1.76	2.06	2.54	3.15	3.79	4.42	4.96	5.43	5.83	6.31	6.82	7.34	7.80	8.20	8.51	8.74	8.87	8.90
85	1.58	1.65	1.72	1.84	2.00	2.17	2.39	2.58	2.77	2.94	2.92	2.89	2.89	2.88	2.86	2.81	2.74	2.62	2.47
90	1.58	1.54	1.50	1.46	1.42	1.38	1.34	1.30	1.26	1.21	1.14	1.07	0.99	0.92	0.85	0.77	0.70	0.63	0.55

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: 1
 Test Date: 2025-12-16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity: 65.0%
 Test Distance: 6.790m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:2041.67x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 一体二代反光4头-6500K-15AH-高亮	DIM.: 0.620*0.250	SERIAL No.:
MFR.: EVERFINE	SUR.: 0.360*0.170	Shielding Angle:

Table--2

UNIT: cd

H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	4.37	4.60	4.83	5.07	5.30	5.53	5.77	6.00	6.23	6.32	6.41	6.51	6.60	6.69	6.78	6.87	6.96	7.05
-85	6.74	6.97	7.18	7.37	7.52	7.65	7.76	7.84	7.90	7.79	7.67	7.55	7.41	7.30	7.20	7.11	7.07	7.05
-80	12.3	12.4	12.4	12.3	12.2	12.0	11.7	11.4	11.0	10.6	10.0	9.45	8.93	8.41	7.92	7.49	7.19	7.05
-75	22.3	24.7	26.3	26.7	26.2	24.7	21.9	18.8	16.4	15.6	14.6	13.2	11.4	9.92	8.88	8.03	7.37	7.05
-70	71.6	71.5	68.6	63.5	56.9	52.1	47.9	44.1	36.3	30.8	24.6	19.2	15.9	12.6	10.1	8.66	7.58	7.05
-65	120	127	130	127	117	108	97.5	78.1	65.6	56.2	44.6	33.7	23.1	16.8	12.0	9.36	7.80	7.05
-60	211	219	218	198	175	172	166	131	112	86.8	69.5	53.0	37.1	22.3	15.0	10.2	8.08	7.05
-55	321	320	306	281	269	266	221	190	176	132	101	74.8	53.0	33.1	18.4	11.2	8.35	7.05
-50	417	409	394	372	357	332	302	279	211	193	140	99.5	70.4	45.4	22.7	12.7	8.63	7.05
-45	484	482	471	457	443	418	373	329	299	224	190	132	88.6	57.5	29.6	14.4	8.91	7.05
-40	577	575	558	533	506	467	451	396	341	294	220	163	109	69.4	37.7	16.4	9.16	7.05
-35	642	630	610	595	571	538	490	462	396	338	266	204	134	82.4	45.5	18.3	9.41	7.05
-30	701	690	672	647	618	589	553	495	455	375	311	229	155	94.6	52.8	20.1	9.67	7.05
-25	748	736	716	689	663	636	598	550	488	416	344	252	175	105	59.3	21.7	9.90	7.05
-20	799	788	760	729	708	677	637	586	518	457	371	284	195	117	65.0	23.8	10.1	7.05
-15	856	842	815	783	752	716	672	618	555	485	392	302	214	127	69.4	25.5	10.2	7.05
-10	909	895	870	835	795	751	701	646	583	502	410	318	228	136	72.8	26.9	10.4	7.05
-5	940	938	913	876	833	782	725	667	600	516	425	330	237	142	75.3	27.8	10.4	7.05
0	977	968	945	906	862	806	743	681	611	526	433	336	242	145	76.8	28.3	10.5	7.05
5	926	928	905	867	827	777	722	664	598	514	423	328	236	142	75.0	27.7	10.4	7.05
10	898	872	852	818	784	742	694	641	580	498	408	314	225	135	72.3	26.7	10.3	7.05
15	843	822	784	762	735	703	661	612	549	479	388	295	210	126	68.7	25.3	10.1	7.05
20	785	767	736	704	688	661	624	579	508	449	367	278	191	115	64.1	23.4	9.92	7.05
25	734	719	693	665	640	616	586	543	478	408	338	251	173	104	58.1	21.3	9.69	7.05
30	687	674	655	629	595	572	544	479	443	366	297	226	151	92.3	51.2	19.6	9.43	7.05
35	642	629	602	573	556	527	470	447	384	331	254	192	129	80.1	44.0	17.8	9.13	7.05
40	554	556	551	530	498	444	433	380	329	274	221	159	105	66.8	36.4	15.8	8.84	7.05
45	491	482	460	436	429	402	355	314	276	220	172	126	84.8	55.1	28.5	13.7	8.56	7.05
50	416	411	395	366	338	318	291	249	207	171	133	93.8	66.7	42.2	21.6	12.0	8.25	7.05
55	298	307	302	281	264	240	200	191	150	124	92.4	69.4	49.6	31.0	17.2	10.5	7.95	7.05
60	204	207	203	190	179	167	140	121	100	78.3	62.8	48.2	33.2	20.7	13.7	9.31	7.66	7.05
65	124	124	120	116	110	101	85.0	67.1	56.8	49.2	39.3	28.7	20.9	15.0	10.7	8.47	7.36	7.05
70	65.3	63.7	59.6	54.1	48.4	43.5	40.3	35.7	29.3	22.9	20.2	16.5	13.6	10.8	8.73	7.73	7.11	7.05
75	18.9	20.4	21.3	21.3	19.8	16.8	14.7	12.9	11.8	11.9	11.3	10.4	9.05	8.04	7.45	7.07	6.88	7.05
80	9.01	9.02	8.92	8.71	8.40	8.03	7.59	7.12	6.67	6.80	6.72	6.57	6.51	6.46	6.46	6.51	6.68	7.05
85	2.68	2.85	2.99	3.09	3.17	3.24	3.30	3.38	3.46	3.84	4.22	4.60	4.95	5.32	5.69	6.08	6.55	7.05
90	0.64	0.74	0.83	0.92	1.01	1.10	1.19	1.29	1.38	2.01	2.64	3.27	3.90	4.53	5.16	5.79	6.42	7.05

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: 1
 Test Date: 2025-12-16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity: 65.0%
 Test Distance: 6.790m [K=1.0000]
 Remarks:

Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	958.5	958.5	958.5	958.5	958.5	958.5	958.5	958.5
3.0	959.1	953.7	949.3	953.2	956.6	953.5	949.9	953.1
6.0	955.7	944.8	938.7	941.5	951.3	940.7	939.9	942.1
9.0	951.6	933.3	922.0	926.5	943.1	926.6	917.5	929.0
12.0	939.9	914.6	893.8	903.9	929.7	900.2	892.8	904.7
15.0	925.5	883.6	862.4	871.7	910.0	866.4	854.1	872.6
18.0	904.9	850.2	821.2	839.1	884.9	832.1	816.8	835.6
21.0	878.4	814.4	793.3	799.5	859.1	786.3	786.0	792.4
24.0	853.3	771.9	765.4	754.7	829.6	745.0	754.5	753.1
27.0	823.4	736.3	739.3	721.1	796.9	712.7	729.8	719.8
30.0	789.1	705.4	711.3	689.2	763.7	677.0	699.6	685.4
33.0	752.3	676.3	678.0	661.5	728.3	650.8	671.3	660.3
36.0	715.5	644.5	633.0	632.0	690.2	620.1	645.0	627.8
39.0	678.1	611.4	580.7	597.7	649.3	583.9	567.4	594.2
42.0	638.4	575.1	556.9	561.9	608.6	549.9	555.3	564.1
45.0	598.0	535.4	483.4	518.0	568.2	518.0	495.1	530.3
48.0	547.1	476.5	440.5	461.5	509.5	459.8	423.1	457.8
51.0	498.1	450.0	386.1	427.8	462.0	407.2	399.6	436.3
54.0	442.8	386.9	305.0	355.7	402.1	363.0	289.4	371.2
57.0	391.9	323.2	257.7	317.4	350.8	290.3	276.0	309.0
60.0	328.6	289.7	202.6	245.5	287.0	249.8	198.5	262.2
63.0	272.1	197.0	141.1	201.0	228.7	175.9	158.5	195.1
66.0	215.0	171.9	105.5	133.2	170.3	130.4	106.7	143.0
69.0	156.3	111.6	78.29	91.02	116.6	88.55	79.24	100.4
72.0	111.0	67.50	40.45	56.73	77.38	51.11	31.24	60.19
75.0	75.17	44.72	19.69	32.98	48.40	29.73	16.98	36.16
78.0	47.50	21.92	15.52	15.20	22.82	12.72	12.21	14.41
81.0	21.77	13.34	10.54	10.84	11.06	7.923	7.550	9.077
84.0	11.83	9.822	7.566	8.255	6.270	4.851	3.813	5.573
87.0	8.364	7.521	5.356	6.380	2.901	2.579	0.5605	3.100
90.0	6.907	6.235	4.169	5.779	1.551	1.216	0.5565	1.395

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: 1
 Test Date: 2025-12-16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity: 65.0%
 Test Distance: 6.790m [K=1.0000]
 Remarks: