



Lightsource Test Report

Product Infomation

Product Number: 86

CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.3710$ $y=0.3722$ $u(u')=0.2207$ $v=0.3321$ $v'=0.4982$

CCT: $T_c=4236K$ ($duv=0.00075$)

Color Ratio: $R=0.161$ $G=0.812$ $B=0.027$

Peak Wavelength: 450.2nm

Half Bandwidth: 17.2nm

Dominant Wavelength: 577.7nm

Color Purity: 0.231

Central Wave: 450.2nm

Gravity Wave: 450.1nm

CRI: $R_a=72.4$

TM30: $R_f=74$, $R_g=93$

GAI: $GAI_BB_8=87.9$, $GAI_BB_15=96.0$, $GAI_EES=72.4$


$R1=69$ $R2=79$ $R3=87$ $R4=71$ $R5=69$ $R6=71$ $R7=81$ $R8=52$

$R9=-34$ $R10=50$ $R11=67$ $R12=40$ $R13=71$ $R14=92$ $R15=63$

Color Quality Scale: $Q_a=72.0$, $Q_f=71.9$, $Q_p=73.2$, $Q_g=89.1$

$Q1=76$ $Q2=97$ $Q3=66$ $Q4=60$ $Q5=69$ $Q6=71$ $Q7=75$ $Q8=83$

$Q9=94$ $Q10=78$ $Q11=73$ $Q12=72$ $Q13=73$ $Q14=59$ $Q15=65$

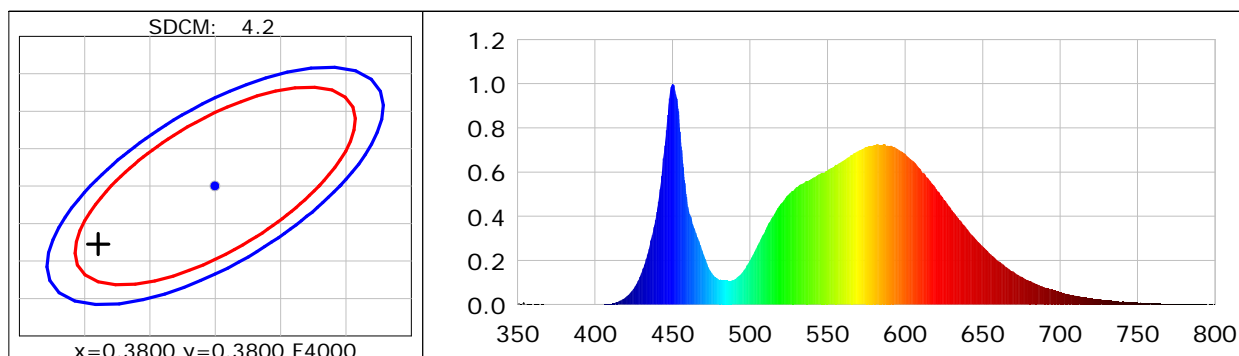

Photometric Parameters

Luminous Flux: 35197 lm

Efficiency: 175.95 lm/W

Radiant Power: 133.422 W

Total mains efficacy: 175.95 lm/W Energy Efficiency Class: A (EU 2019/2015)

Auxiliary lamp correction factor: 1.00

Electric Parameters

Voltage: 219.55V

Current: 0.9236A

Power: 200.04W

Power Factor: 0.9865

Frequency: 49.99Hz

DF: 0.9887

Test Infomation

Scan Range: 350~800:1nm

Photometric Method: sphere-spectroradiometer

Stabilization Time: 0 Min ALC.: 1.0000

Photometric Condition: Sphere diameter: 2.00m, 4T

Max of Signal: 45667 (2705)

CCD Integration Time: 23.71 ms

Condition: Tx:25.0°C, Ti:23.9°C, R.H.:60%

Test Device: CMS-3500S

Test Lab:

Test Time: 2025-10-22 15:25:11

Operator:

Inspector: