

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	422.4 cd per klm. 0.0 degrees vertical -43.0 degrees horizontal
---	---

Beam Spread	At 10% of I _{max}	124.8V x 151.1H
	At 50% of I _{max}	90.4V x 142.2H
	At 90% of I _{max}	55.2V x 125.5H

Beam Flux	Total	1000.0 lumens per klm.
	To 10% of I _{max}	977.4 lumens per klm.
	To 50% of I _{max}	793.2 lumens per klm.
	To 90% of I _{max}	377.4 lumens per klm.

Upward LOR	0.0 %
Downward LOR	100.0 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:1
 Test Date:2023-12-13

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:6.790m [K=1.0000]
 Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:1816.96x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:一体透镜二代3头-6500K-12AH	DIM.: 510*230	SERIAL No.:
MFR.: EVERFINE	SUR.:260*170	Shielding Angle:

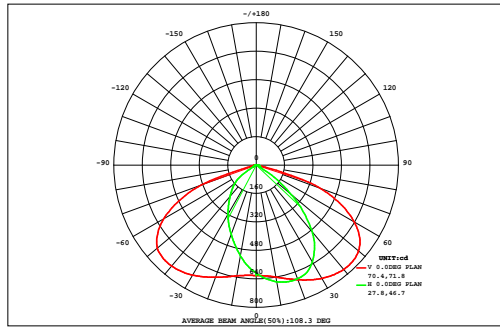

DATA OF LAMP		PHOTOMETRIC DATA	
MODEL	--	Imax(cd)	767.5
NOMINAL POWER(W)	--	AVAILABILITY(%)	97.8
RATED VOLTAGE(V)	--	Avai. FLUX(lm)	1776
NOMINAL FLUX(lm)	1816.96	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1817
TEST VOLTAGE(V)	--	θ @50%(H,V)	142,90DEG

VERTICAL(DEG)	AREA FLUX DIAGRAM																UNIT:lm	Φ t	Φ a	
	0.00	0.01	0.02	0.03	0.03	0.04	0.05	0.05	0.04	0.04	0.04	0.04	0.03	0.03	0.06	0.07				0.06
90	0.00	0.01	0.02	0.03	0.03	0.04	0.05	0.05	0.04	0.04	0.04	0.04	0.03	0.03	0.06	0.07	0.06	0.03	0.66	0.00
80	0.01	0.02	0.05	0.12	0.22	0.33	0.39	0.38	0.29	0.27	0.31	0.30	0.24	0.16	0.10	0.08	0.06	0.02	3.36	0.00
70	0.01	0.04	0.18	0.71	1.13	1.38	1.63	1.45	0.90	0.79	1.16	1.22	0.97	0.77	0.45	0.14	0.06	0.02	13.0	1.69
60	0.01	0.08	0.78	2.60	3.29	3.54	3.98	3.95	3.38	3.25	3.59	3.44	2.89	2.66	1.97	0.48	0.08	0.03	40.0	37.2
50	0.01	0.17	2.15	4.65	5.92	6.15	6.81	6.98	6.40	6.24	6.54	6.14	5.39	5.26	4.04	1.54	0.13	0.03	74.5	73.9
40	0.01	0.41	3.56	6.62	8.53	8.91	9.16	9.53	8.93	8.75	8.99	8.36	8.12	7.85	6.02	2.92	0.25	0.03	107	106
30	0.01	0.76	4.74	8.47	10.9	11.9	11.9	12.1	11.8	11.6	11.5	11.1	11.1	10.3	7.89	4.15	0.46	0.03	141	140
	0.02	1.10	5.71	10.1	13.2	14.7	15.1	14.9	14.7	14.4	14.2	14.3	14.0	12.6	9.59	5.16	0.72	0.03	175	174
	0.02	1.32	6.49	11.6	15.4	17.4	18.1	18.0	17.6	17.3	17.5	17.5	16.8	14.8	11.1	5.94	0.91	0.03	208	208
	0.02	1.32	6.51	11.9	16.2	18.7	19.9	19.9	19.6	19.6	19.7	19.4	18.2	15.6	11.4	5.96	0.91	0.03	225	225
	0.02	1.09	5.77	10.9	15.4	18.6	20.5	21.1	20.8	20.8	20.9	20.1	18.2	14.9	10.3	5.21	0.71	0.03	225	225
	0.02	0.75	4.78	9.38	14.0	17.8	20.4	21.1	20.6	20.6	20.9	20.1	17.4	13.5	8.79	4.19	0.46	0.03	215	215
-30	0.01	0.40	3.54	7.31	11.6	15.6	18.2	18.8	18.1	18.0	18.6	17.8	15.0	10.9	6.68	2.91	0.25	0.03	184	183
-40	0.01	0.18	2.10	4.88	7.83	11.1	13.2	13.7	12.6	12.5	13.4	12.7	10.4	7.12	4.24	1.51	0.14	0.03	128	127
-50	0.01	0.09	0.75	2.49	3.69	5.26	6.60	6.61	5.30	5.17	6.24	6.02	4.52	3.00	1.91	0.47	0.09	0.03	58.2	56.5
-60	0.01	0.05	0.20	0.64	0.93	1.30	1.83	1.78	1.12	1.01	1.48	1.42	0.94	0.66	0.43	0.17	0.08	0.03	14.1	3.88
-70	0.01	0.04	0.10	0.20	0.27	0.34	0.42	0.48	0.48	0.46	0.44	0.38	0.31	0.25	0.19	0.12	0.07	0.03	4.58	0.00
-80	0.00	0.02	0.04	0.07	0.12	0.14	0.16	0.16	0.15	0.15	0.15	0.14	0.13	0.11	0.10	0.09	0.07	0.03	1.83	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL(DEG)	20	30	40	50	60	70	80	90			
Φ t	0.20	7.85	47.5	92.8	129	153	168	171	163	161	166	161	145	121	85.3	41.1	5.49	0.48	1817	---
Φ a	0.00	6.15	46.0	91.2	127	151	166	167	159	158	162	158	142	118	83.5	39.2	3.25	0.00	---	1776


one-half-peak spread: U:48.4,D:42.3 , L:28.9,NEMA. Beam Type: Type 7 x 6 (H x V)

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:1
 Test Date:2023-12-13

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:6.790m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:1816.96x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:一体透镜二代3头-6500K-12AH	DIM.: 510*230	SERIAL No.:
MFR.: EVERFINE	SUR.:260*170	Shielding Angle:

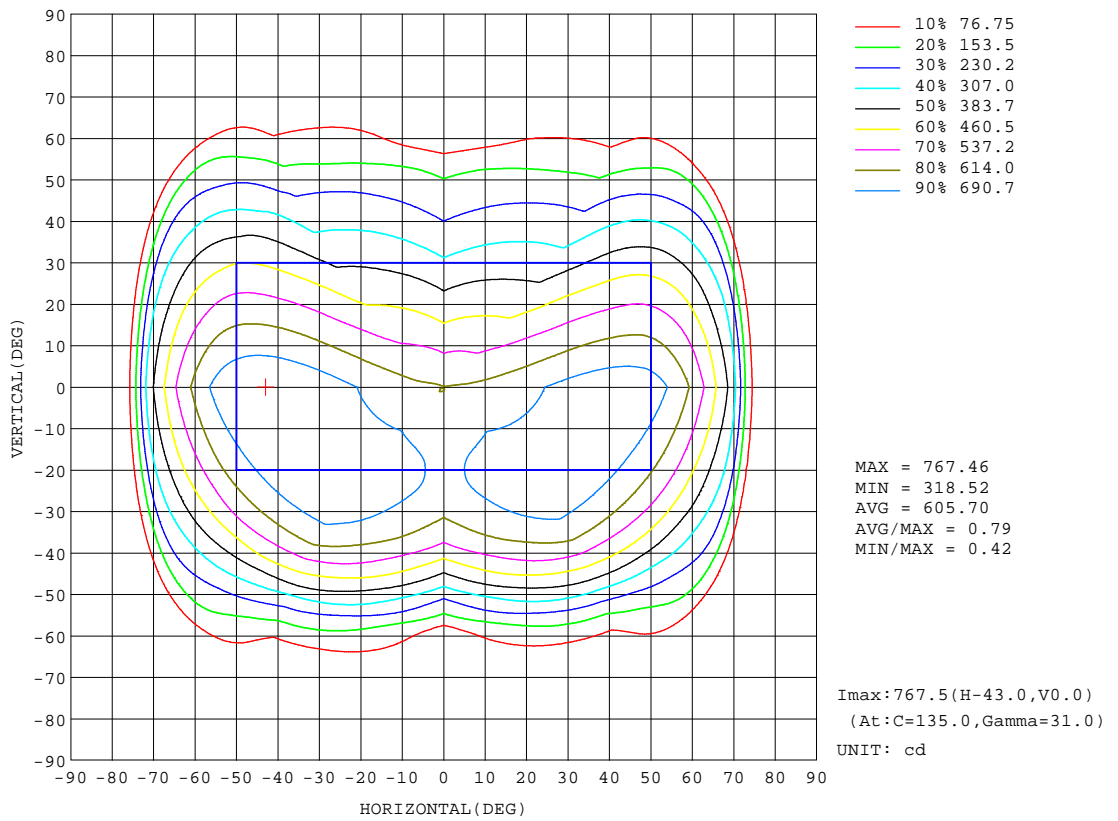


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:1
Test Date:2023-12-13

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:6.790m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:1816.96x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:一体透镜二代3头-6500K-12AH	DIM.: 510*230	SERIAL No.:
MFR.: EVERFINE	SUR.:260*170	Shielding Angle:

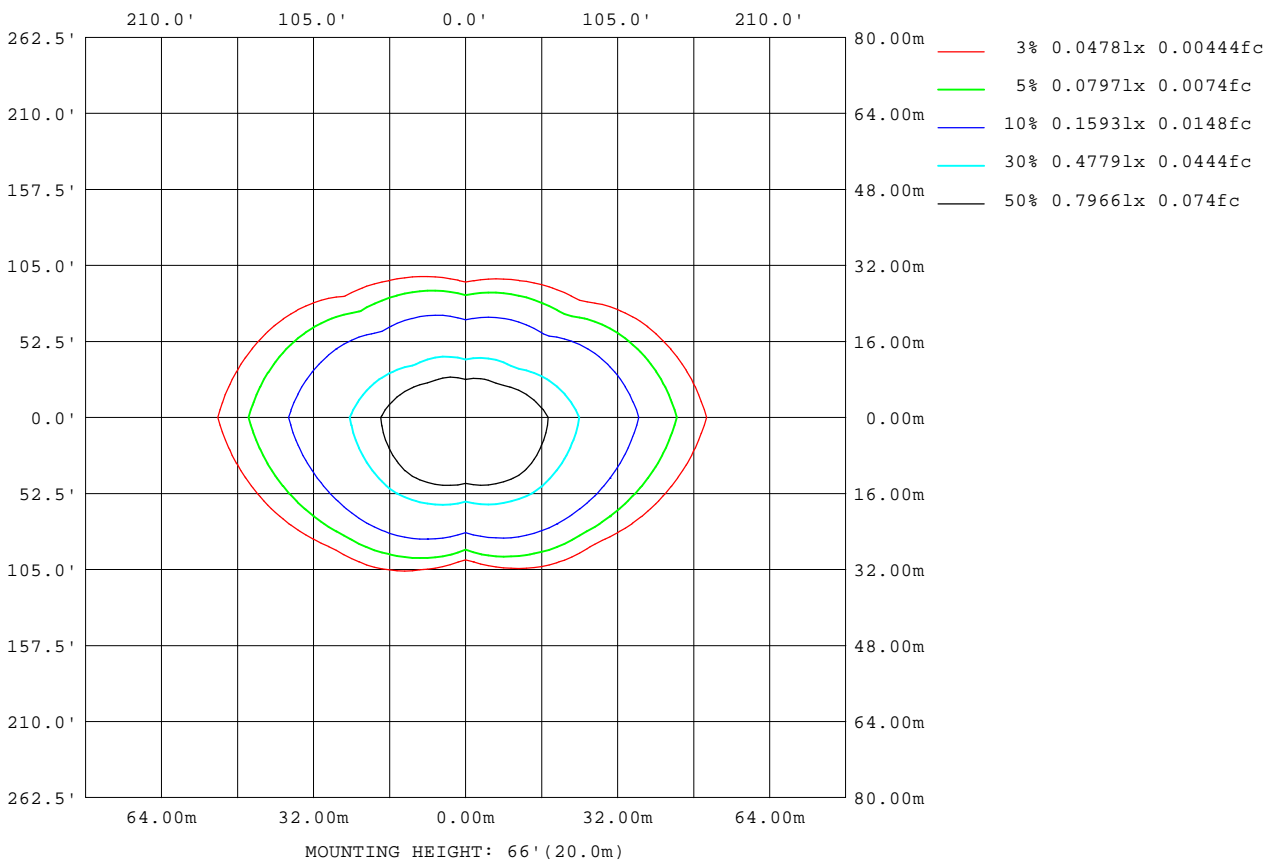

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:1
 Test Date:2023-12-13

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:6.790m [K=1.0000]
 Remarks:

Planar Illuminance Curve

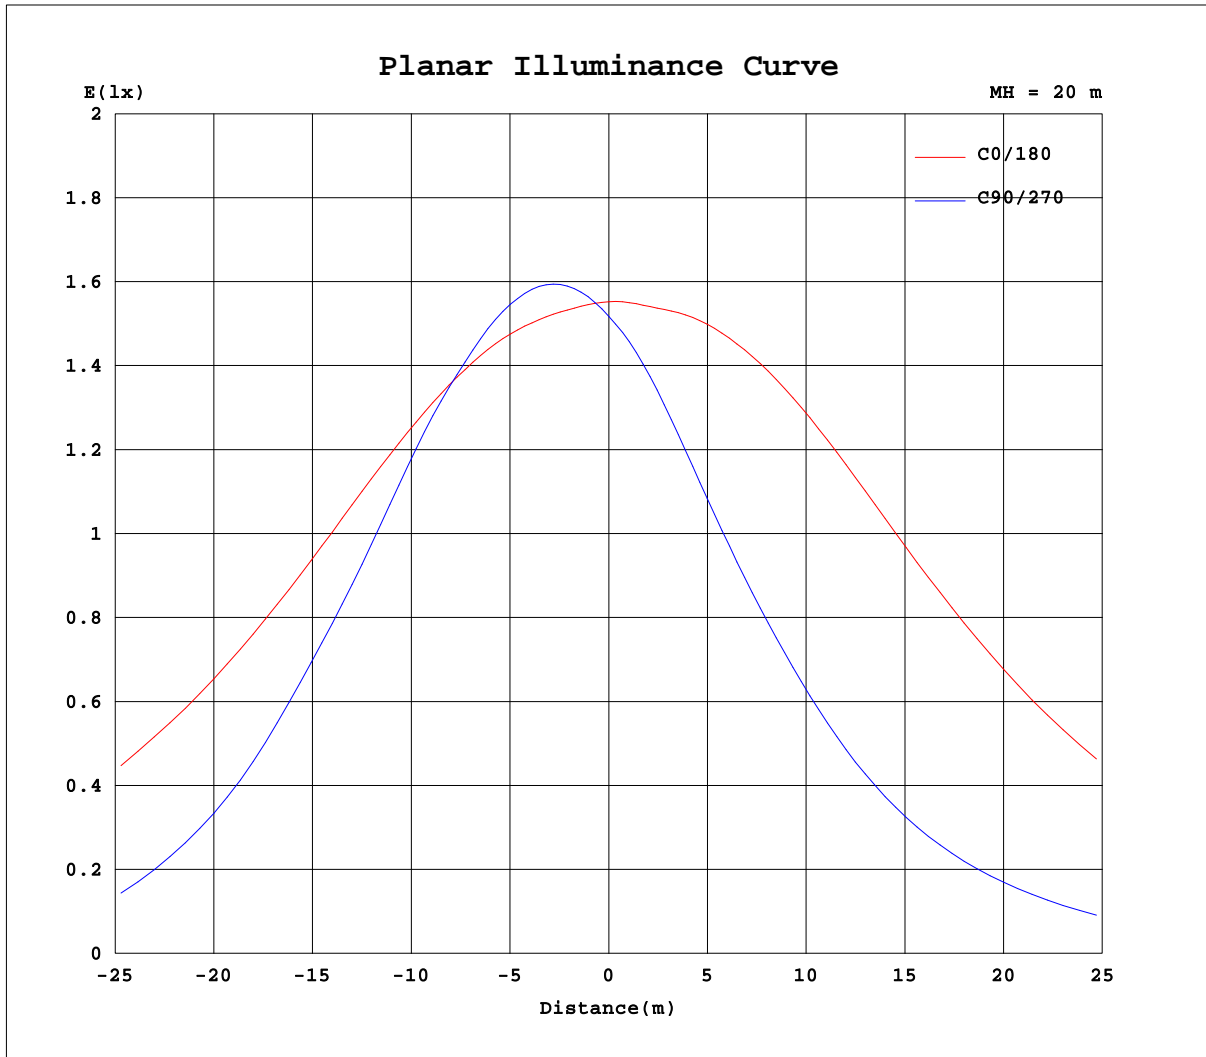


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: 1
 Test Date: 2023-12-13

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity: 65.0%
 Test Distance: 6.790m [K=1.0000]
 Remarks:

AAI Figure

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:1816.96x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:一体透镜二代3头-6500K-12AH	DIM.: 510*230	SERIAL No.:
MFR.: EVERFINE	SUR.:260*170	Shielding Angle:

Flux out:1101 lm

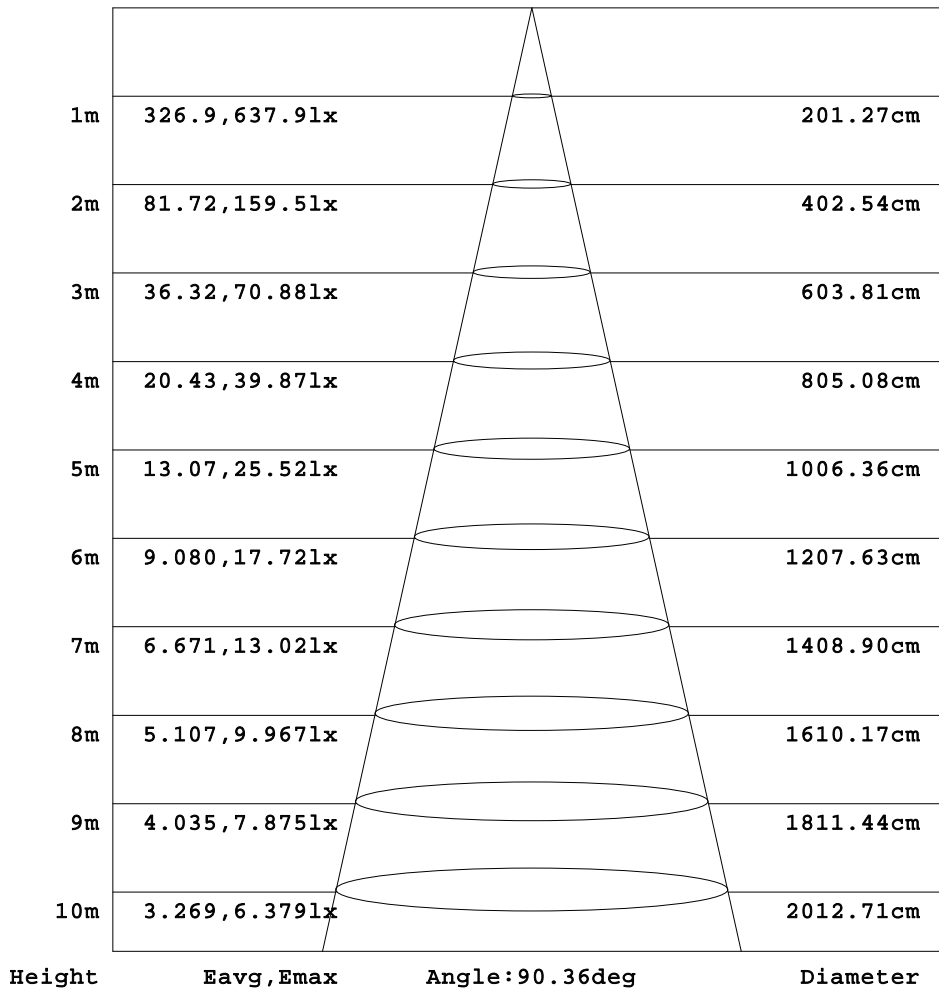

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:1
 Test Date:2023-12-13

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:6.790m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:1816.96x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:一体透镜二代3头-6500K-12AH	DIM.: 510*230	SERIAL No.:
MFR.: EVERFINE	SUR.:260*170	Shielding Angle:

Table--1

UNIT: cd

H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.75	0.99	1.24	1.49	1.73	1.98	2.23	2.48	2.72	2.97	2.77	2.57	2.37	2.17	1.97	1.77	1.58	1.38	1.18
-85	0.75	1.09	1.40	1.97	2.54	2.94	3.31	3.66	4.13	4.71	4.89	5.01	5.10	5.09	4.99	4.79	4.53	4.19	3.80
-80	0.75	1.19	2.44	3.33	4.12	5.12	6.48	7.90	9.37	10.8	11.1	11.2	11.2	11.1	11.0	10.9	10.9	10.8	10.6
-75	0.75	1.68	3.31	4.40	5.89	7.62	9.47	11.1	12.2	12.4	12.5	12.9	13.5	14.1	14.7	15.3	15.7	15.9	15.9
-70	0.75	2.34	3.96	5.52	7.51	9.88	12.4	15.2	17.0	16.1	16.5	19.6	22.4	24.5	25.7	25.6	24.1	21.4	18.1
-65	0.75	2.90	4.52	6.53	9.33	13.8	20.3	28.7	42.4	40.5	34.9	45.1	54.6	60.9	62.4	58.4	48.9	35.6	20.2
-60	0.75	3.23	5.07	7.62	12.5	22.7	45.6	81.7	95.5	88.4	87.0	113	129	133	127	113	91.3	63.5	31.8
-55	0.75	3.54	5.55	9.15	19.2	41.9	107	147	156	169	181	208	226	233	236	228	210	182	145
-50	0.75	3.77	6.03	11.8	29.8	96.9	178	207	237	264	292	328	358	367	364	350	328	298	258
-45	0.75	3.94	6.50	16.0	48.2	168	234	278	320	362	413	451	474	484	483	471	449	418	379
-40	0.75	4.09	7.10	21.7	94.9	231	292	350	402	462	509	552	581	588	581	568	550	524	490
-35	0.75	4.22	7.80	28.8	145	280	352	417	482	541	589	632	665	665	658	645	627	603	573
-30	0.75	4.33	8.72	37.0	202	325	409	480	551	605	651	686	710	722	710	693	674	654	630
-25	0.75	4.41	9.63	49.0	252	368	459	537	605	655	694	719	737	748	740	719	701	685	668
-20	0.75	4.46	10.9	62.1	291	409	505	587	649	693	722	739	749	751	747	727	708	692	679
-15	0.75	4.50	11.9	83.1	323	447	545	627	683	720	740	749	750	743	732	722	702	687	679
-10	0.75	4.51	12.7	99.7	349	479	580	660	710	739	751	753	746	732	715	699	687	669	666
-5	0.75	4.51	13.2	111	370	506	610	687	732	754	759	754	740	720	698	678	659	645	641
0	0.75	4.49	13.4	117	386	529	634	710	751	766	765	754	736	712	686	661	640	625	621
5	0.75	4.45	13.1	111	370	505	603	672	706	717	713	700	680	657	633	611	593	579	568
10	0.75	4.40	12.6	100	350	477	567	630	660	667	661	646	626	603	580	560	542	536	518
15	0.75	4.34	11.7	83.6	325	444	528	586	612	616	608	592	571	548	525	502	498	487	465
20	0.75	4.26	10.5	62.7	293	407	487	538	563	564	553	537	515	490	464	458	452	438	415
25	0.75	4.17	9.06	49.6	254	367	443	487	512	511	498	479	456	429	417	414	406	390	367
30	0.75	4.06	7.99	37.4	205	326	395	435	458	457	441	419	393	375	375	369	358	342	319
35	0.75	3.95	6.88	29.0	148	284	345	382	398	401	384	358	328	332	332	325	313	295	272
40	0.75	3.81	6.03	21.6	97.2	236	291	327	340	340	326	298	286	290	288	281	269	252	230
45	0.75	3.67	5.30	15.3	49.8	173	239	269	282	276	264	240	247	248	245	238	227	212	193
50	0.75	3.51	4.79	10.5	30.5	101	184	210	221	217	198	189	199	203	202	196	186	172	155
55	0.75	3.30	4.33	7.32	18.8	44.2	114	155	160	154	139	142	143	140	139	135	127	116	100
60	0.75	3.00	3.94	5.44	10.9	23.2	49.2	89.5	106	97.2	84.4	95.7	100	97.4	89.6	77.8	63.5	46.8	28.4
65	0.75	2.69	3.61	4.36	6.51	12.1	20.9	32.3	50.2	51.8	46.6	53.4	57.0	57.5	55.1	49.3	40.4	29.3	17.0
70	0.75	2.13	3.26	3.65	4.40	6.21	9.67	14.5	18.7	20.8	23.4	26.7	28.5	28.8	27.8	25.4	21.6	16.7	11.2
75	0.75	1.46	2.79	3.13	3.32	3.76	4.61	6.07	7.92	9.68	11.1	12.2	12.7	12.9	12.6	12.0	10.9	9.36	7.61
80	0.75	0.95	1.99	2.53	2.66	2.64	2.63	2.77	3.00	3.31	3.88	4.38	4.78	4.98	5.06	4.95	4.70	4.33	3.87
85	0.75	0.84	0.92	1.28	1.63	1.78	1.72	1.60	1.41	1.20	1.17	1.14	1.12	1.09	1.04	0.98	0.91	0.83	0.73
90	0.75	0.73	0.72	0.70	0.68	0.67	0.65	0.64	0.62	0.61	0.58	0.56	0.53	0.51	0.49	0.46	0.44	0.42	0.39

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:1
 Test Date:2023-12-13

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:6.790m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:1816.96x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:一体透镜二代3头-6500K-12AH	DIM.: 510*230	SERIAL No.:
MFR.: EVERFINE	SUR.:260*170	Shielding Angle:

Table--2

UNIT: cd

H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	1.53	1.89	2.24	2.60	2.95	3.31	3.66	4.02	4.37	5.26	6.15	7.04	7.93	8.83	9.72	10.6	11.5	12.4
-85	3.96	4.07	4.13	4.14	4.10	4.00	3.85	3.81	3.88	4.46	5.08	5.87	6.70	7.67	8.73	9.86	11.1	12.4
-80	10.8	10.8	10.8	10.8	10.8	10.6	10.3	9.87	9.25	8.38	7.73	7.36	7.36	7.49	8.03	9.22	10.7	12.4
-75	15.5	15.1	14.6	14.0	13.4	12.7	12.2	12.0	12.1	11.8	11.0	9.99	9.13	8.70	8.63	8.77	10.4	12.4
-70	19.6	20.7	21.1	20.5	19.1	17.4	15.2	13.5	13.7	14.3	13.2	11.9	10.7	9.73	9.33	8.99	10.0	12.4
-65	31.4	40.6	46.2	47.7	45.1	39.1	31.5	24.0	27.2	25.6	20.6	15.9	12.4	10.6	9.79	9.68	9.75	12.4
-60	59.5	83.3	101	110	110	102	84.0	61.4	67.5	70.7	47.9	28.7	17.2	11.8	10.2	9.97	9.58	12.4
-55	177	201	215	218	214	202	177	146	134	129	114	61.7	27.9	15.0	10.6	10.1	9.41	12.4
-50	294	320	338	347	346	331	299	261	226	199	176	134	52.1	21.5	11.4	10.2	9.60	12.4
-45	416	444	462	469	464	447	420	379	330	282	239	201	106	31.6	13.2	10.2	9.98	12.4
-40	522	545	561	571	573	559	523	478	429	369	312	255	178	52.1	16.2	10.3	10.3	12.4
-35	601	622	638	648	652	648	609	561	510	450	380	310	239	78.3	20.6	10.3	10.6	12.4
-30	652	671	687	701	710	695	667	627	576	519	447	368	286	123	25.9	10.5	10.7	12.4
-25	683	698	714	733	738	722	702	673	629	574	505	420	327	176	32.3	10.7	10.7	12.4
-20	691	704	722	740	741	734	721	702	669	619	554	466	365	222	38.9	11.1	10.8	12.4
-15	686	699	717	723	731	735	730	719	696	656	594	509	401	260	48.2	11.4	10.9	12.4
-10	671	687	693	704	718	730	733	729	716	684	628	545	434	291	55.7	11.6	10.9	12.4
-5	650	657	670	686	704	722	732	736	730	707	655	575	461	315	60.9	11.7	11.0	12.4
0	622	632	650	671	693	714	731	741	741	726	678	599	484	331	63.8	11.8	11.1	12.4
5	565	579	595	614	636	657	675	687	691	681	639	568	460	315	61.0	11.6	11.0	12.4
10	525	521	539	558	579	601	620	633	640	633	597	532	431	291	55.8	11.3	10.9	12.4
15	478	479	477	499	521	544	564	579	588	584	553	493	398	261	48.4	11.0	10.8	12.4
20	430	436	435	435	460	485	507	524	536	533	505	450	363	223	39.1	10.5	10.7	12.4
25	383	391	392	389	398	424	448	468	482	480	456	404	326	177	32.4	9.98	10.6	12.4
30	335	345	350	350	343	360	387	411	426	425	403	357	287	124	25.8	9.67	10.5	12.4
35	289	301	307	307	303	295	326	353	368	368	347	304	241	79.7	20.2	9.38	10.4	12.4
40	246	257	264	266	263	256	266	293	309	308	291	254	181	53.2	15.5	9.21	10.1	12.4
45	207	217	223	226	224	218	207	232	247	247	232	204	108	32.0	11.9	9.12	9.76	12.4
50	168	177	182	184	180	172	164	169	184	187	178	138	54.1	21.3	9.64	9.11	9.36	12.4
55	112	118	122	123	123	121	116	108	124	131	119	65.0	28.7	13.6	8.54	9.13	9.16	12.4
60	43.3	56.3	66.8	75.0	77.9	77.0	70.7	60.0	72.8	77.0	52.0	30.1	16.4	9.20	8.09	9.18	9.30	12.4
65	25.6	33.1	38.8	42.0	42.5	40.2	36.0	31.2	33.6	29.4	21.8	14.9	9.42	7.53	7.96	9.04	9.46	12.4
70	14.4	17.2	19.2	20.4	20.5	19.7	18.1	16.2	15.1	13.6	10.5	7.71	6.71	6.95	8.00	8.40	9.71	12.4
75	8.55	9.34	9.91	10.2	10.3	10.00	9.34	8.26	6.92	5.89	5.32	5.32	5.88	6.87	7.70	8.16	10.0	12.4
80	4.05	4.15	4.16	4.06	3.82	3.55	3.19	2.73	2.30	2.92	3.70	4.66	5.62	6.26	7.11	8.56	10.3	12.4
85	0.79	0.84	0.88	0.91	0.94	0.96	0.98	1.01	1.05	2.01	2.95	4.00	5.11	6.34	7.68	9.13	10.7	12.4
90	0.43	0.46	0.50	0.53	0.56	0.60	0.63	0.67	0.70	2.00	3.30	4.60	5.90	7.19	8.49	9.79	11.1	12.4

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:1
 Test Date:2023-12-13

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:6.790m [K=1.0000]
 Remarks:

Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	611.9	611.9	611.9	611.9	611.9	611.9	611.9	611.9
3.0	611.7	626.4	633.4	629.0	613.7	597.7	589.8	595.6
6.0	614.2	641.9	651.6	646.3	617.4	582.2	563.1	577.9
9.0	620.5	658.2	666.6	663.4	626.2	566.7	532.4	558.9
12.0	629.5	674.3	677.4	681.6	638.3	550.7	500.0	539.3
15.0	640.7	688.8	684.2	700.0	651.2	533.8	468.2	519.4
18.0	652.6	702.5	686.1	716.1	665.5	515.3	437.3	498.5
21.0	665.2	715.2	683.6	730.3	680.8	496.8	407.9	478.1
24.0	678.5	726.0	677.4	743.0	696.0	478.1	379.1	457.5
27.0	691.6	736.1	661.2	753.4	711.2	458.5	350.2	435.6
30.0	704.0	742.3	634.6	760.3	724.8	437.9	321.0	413.3
33.0	714.7	741.1	601.2	760.2	736.6	418.0	292.3	392.4
36.0	722.5	730.1	563.3	751.6	745.6	397.5	265.5	370.3
39.0	728.3	710.6	514.4	733.8	752.5	374.1	240.2	345.6
42.0	731.3	681.9	449.5	706.1	756.0	349.2	216.2	320.0
45.0	729.9	642.7	381.5	668.8	754.9	323.9	194.1	294.9
48.0	724.1	585.5	311.3	617.3	748.2	297.8	171.8	269.1
51.0	708.5	513.9	233.3	549.6	734.1	272.9	148.6	243.7
54.0	680.2	436.0	167.6	473.0	710.7	246.2	115.8	216.4
57.0	640.9	352.0	89.20	391.8	673.8	215.3	64.60	186.2
60.0	590.5	255.0	32.09	289.8	625.0	176.7	28.61	151.2
63.0	525.9	162.8	22.04	202.1	566.3	143.5	19.75	114.1
66.0	446.7	89.36	19.95	124.3	494.9	105.2	16.09	77.89
69.0	366.0	40.77	18.47	60.84	410.9	68.58	12.40	46.70
72.0	206.3	19.98	17.59	29.25	298.4	41.53	10.01	27.97
75.0	62.82	13.05	16.04	16.10	115.5	23.40	7.668	16.53
78.0	20.27	11.87	13.07	12.86	29.12	13.20	5.218	9.930
81.0	10.36	11.68	9.550	12.45	8.975	6.208	3.223	4.236
84.0	10.57	7.302	5.109	9.439	4.873	2.327	0.9706	1.670
87.0	9.762	3.642	1.821	3.872	3.587	1.060	0.3895	0.9459
90.0	12.20	4.359	1.186	3.002	0.7359	0.6034	0.3954	0.7107

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: 1
 Test Date: 2023-12-13

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity: 65.0%
 Test Distance: 6.790m [K=1.0000]
 Remarks: